

OPTOTRONIC OT 35/220-240/700 LTCS

Constant current ECG 700 mA for LED modules with LEDSet




- Suitable for indoor applications

Product benefits

- Large output power range: up to 35 W
- Flexible current control via DIP switch and LEDset interface
- Very low switch-on current
- Flexible and future-proof option for current setting
- Consistently high efficiency

Product features

- SELV equivalent
- Current output range: 100...700 mA

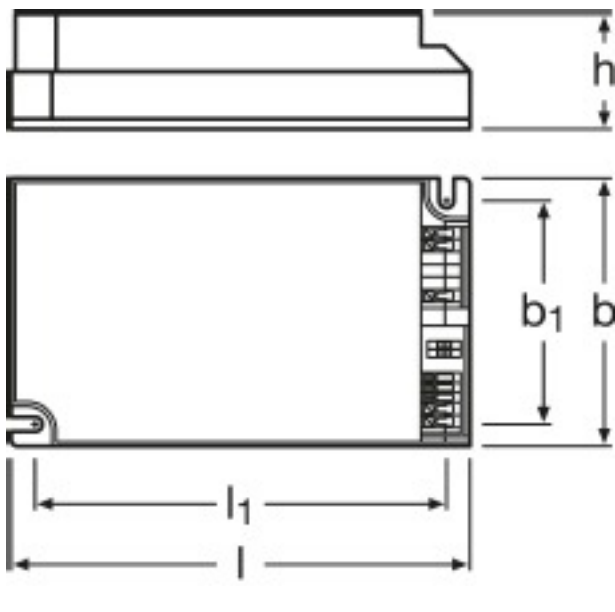

Product line drawing with letters

Technical data

Product description	Nominal current	Ambient temperature range	Input voltage	Nominal voltage	Output current	Mains frequency
	0.19 A ¹⁾	-25...+50 °C	195...264 V ²⁾	220...240 V	100...700 mA ³⁾	50/60 Hz

Product description	Output voltage	Maximum temperature at tc test point	Maximum wiring length ECG/lamp	Approval marks – approval
	24...87 V ⁴⁾	85 °C ⁵⁾	2.0 m	CE

¹⁾ At 230 V

²⁾ Permitted voltage range

³⁾ ±5% (350-700 mA)

⁴⁾ Maximum 100 V

⁵⁾ Maximum at the Tc-point

Equipment / Accessories

- Optional: Cable Clamps QT K3 or Otp K3

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.