

OPTOTRONIC OT 75/220-240/24

Constant voltage ECG 24 V for LED modules




- Suitable for indoor applications

Product benefits

- Higher output power possible thanks to secondary-side parallel connection (up to 4 ECGs)
- Intelligent power matching thanks to Smart power supply

Product features

- SELV equivalent
- Integrated cable clamp

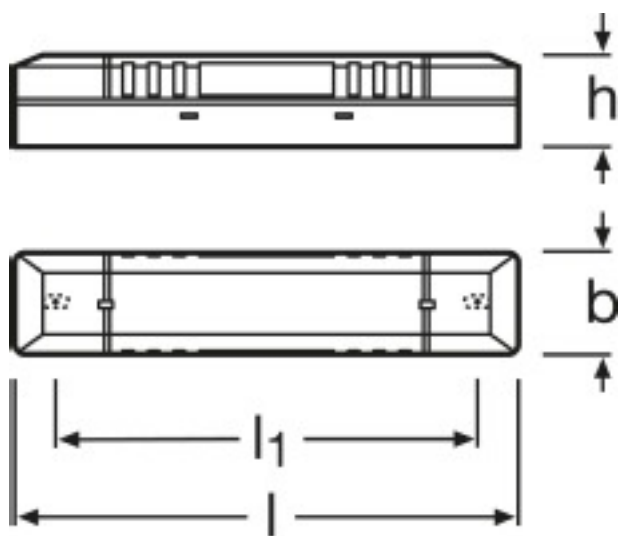

Product line drawing with letters



Product line drawing - technical

Technical data

Product description	Ambient temperature range	Input voltage	Nominal voltage	Mains frequency	Output voltage	Maximum temperature at tc test point
	-20...+50 °C	198...254 V ¹⁾	220...240 V	50/60 Hz	24 V ²⁾	80 °C

Product description	Maximum wiring length ECG/lamp	Length
	10 m	220.0 mm

¹⁾ Permitted voltage range

²⁾ ±1.0 V

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.