

OPTOTRONIC OTi DALI 75/220-240/24 1-4 CH

Power supplies for LED modules




- For luminaires of protection classes I and II
- Suitable for separate mounting
- Suitable for indoor applications

Product benefits

- Flexible addressing via DALI

Product features

- 4 channel DALI converter
- Dimming range: 0...100 % luminous flux

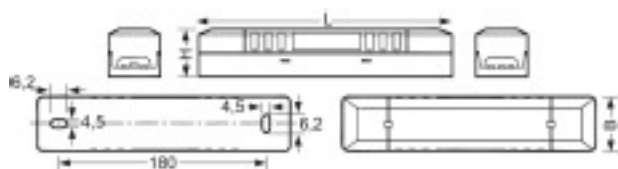

Product line drawing with numbers

Technical data

Product description	Nominal current	Ambient temperature range	Input voltage	Nominal voltage	Mains frequency	Output voltage
	0.37 A ¹⁾	-20...+50 °C	198...254 V ²⁾	220...240 V	50/60 Hz	24 V ³⁾

Product description	Dimming interface	Dimming range	Maximum temperature at tc test point	Maximum wiring length ECG/lamp
	DALI	0...100 %	75 °C ⁴⁾	10 m

1) At 230 V

2) Permitted voltage range

3) +1.0/-0.5 V

4) Maximum at the Tc-point

Equipment / Accessories

- Suitable for 24 V LED modules

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.