

---

## DALI CON 1...10 LI | Signal converters DALI to 1...10 V for LMS



---

### Product benefits

- Can be used purely as a switching actuator

---

### Product features

- Load capacity of the signal output: max. 100 mA
- 0...10 V max. 5 mA active
- Switchable characteristic: linear/logarithmic
- Load capacity of switching contact: 5 A
- Touch DIM control of 1...10 V ECGs

## Technical data


---

### Electrical data

System wattage	5 W
Nominal voltage	220...240 V
Mains frequency	50/60 Hz

### Dimensions & weight

Length	190.0 mm
Height	27.0 mm
Width	30.0 mm

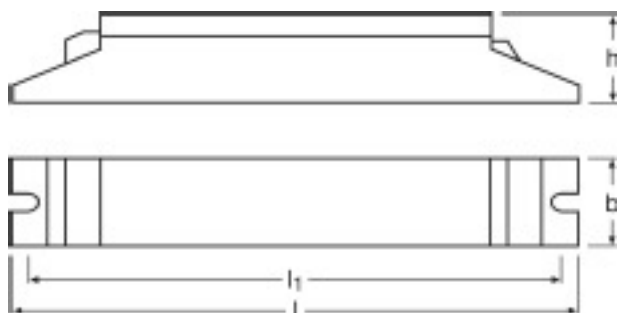

---

*Product line drawing with letters*

### Temperatures

Ambient temperature range	0...+50 °C
---------------------------	------------

**Capabilities**

<b>Dimming interface</b>	DALI / 1...10 V
<b>Type of installation</b>	Luminaire integration
<b>Number of control outputs</b>	1

**Certificates & standards**

<b>Type of protection</b>	IP20
---------------------------	------

## Equipment / Accessories

---

- Suitable for up to 100 Electronic Control Gears
- Suitable for up to 33 signal amplifiers DIM SA

**Logistical Data**

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300638973	Folding carton box 1	35 mm x 35 mm x 192 mm	197.00 g	0.24 dm <sup>3</sup>
4050300638980	Shipping carton box 40	240 mm x 200 mm x 370 mm	8280.00 g	17.76 dm <sup>3</sup>

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.