

## OPTOTRONIC OTe 15/220-240/350 PC

---

Power supplies for LED modules



- Suitable for indoor applications

### Product benefits


---

- Compatible with the most common leading-edge and trailing-edge phase dimmers
- Compact housing for mounting in very tight spaces

### Product features

---

- SELV equivalent
- Dimmable via leading edge/trailing edge
- Integrated cable clamp for separate installation

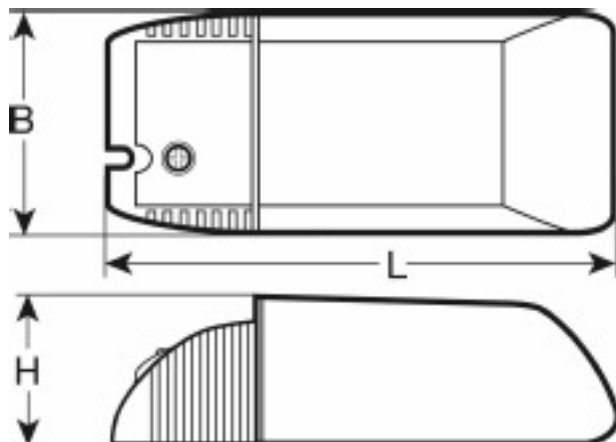

*Product line drawing with letters*

## Technical data

Product description	Ambient temperature range	Input voltage	Nominal voltage	Output current	Mains frequency	Output voltage
	-20...+45 °C	195...264 V <sup>1)</sup>	220...240 V	350 mA <sup>2)</sup>	50/60 Hz	28...45.5 V <sup>3)</sup>

Product description	Dimming interface	Dimming range	Maximum temperature at tc test point
	Phase Cut	10...100 %	70 °C <sup>4)</sup>

1) Permitted voltage range

2) ±5 %

3) Maximum <48 V

4) Maximum at the Tc-point

## **Application advice**

---

For more detailed application information and graphics please see product datasheet.

## **Disclaimer**

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.