

OPTOTRONIC OTe 15/220-240/700 PC

Power supplies for LED modules




- Suitable for indoor applications

Product benefits

- Compatible with the most common leading-edge and trailing-edge phase dimmers
- Compact housing for mounting in very tight spaces

Product features

- SELV equivalent
- Dimmable via leading edge/trailing edge
- Integrated cable clamp for separate installation

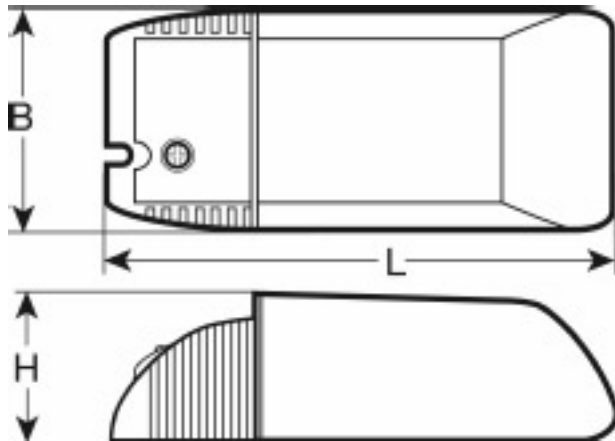

*Product line drawing with letters
15/220...240/700 PC*

Technical data

Product description	Ambient temperature range	Input voltage	Nominal voltage	Output current	Mains frequency	Output voltage
15/220...240/700 PC	-20...+45 °C	195...264 V ¹⁾	220...240 V	700 mA ²⁾	50/60 Hz	14.3...23 V ³⁾

Product description	Dimming interface	Dimming range	Maximum temperature at tc test point
15/220...240/700 PC	Phase Cut	10...100 %	70 °C ⁴⁾

1) Permitted voltage range

2) ± 5 %

3) Maximum <30 V

4) Maximum at the Tc-point

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.