

OPTOTRONIC OT EASY 60 II

Dimmers for LED modules




Product benefits

- UL certified

Product features

- 4 PWM outputs
- RGB(W) sequencer for up to 4 freely programmable sequences
- Up to 16 different RGB(W) lighting scenes can be configured with cross-fade times
- Up to 16 static lighting scenes can be stored and retrieved
- Maximum LED wattage: 60 W
- Casing with strain relief for separate installation
- Up to 64 controllers can be synchronized

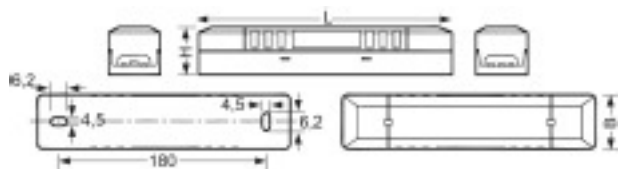

Product line drawing with numbers

Technical data

Product description	Ambient temperature range	Nominal voltage	Mains frequency	Output voltage	Dimming interface	Maximum temperature at tc test point
	-20...+50 °C	220...240 V	50/60 Hz	24 V ¹⁾	EASY	80 °C

¹⁾ DC voltage

Equipment / Accessories

- Integrated power supply for direct connection of 24 V LED modules (up to 60 W)

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.