

PRODUCT FAMILY DATASHEET

LEDVANCE OUTDOOR LED FACADE UPDOWN

Luminaires with classic shape and light outlet up and down



AREAS OF APPLICATION

- Outdoor
- Building facades
- Decorative illumination

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

PRODUCT FEATURES

- Very bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Available in two housing colors: white and dark gray
- Diffuser made of clear glass



TECHNICAL DATA

| Product description | Electrical data | | | | | | Photometrical data | | | | |
|--|-----------------|-----------------|-----------------|----------------|-----------------|------------------------|--------------------|---------------|-------------------|---------------------------|--------------------------|
| | Nominal wattage | Nominal voltage | Nominal current | Operating mode | Mains frequency | Power factor λ | Luminous efficacy | Luminous flux | Color temperature | Light color (designation) | Color rendering index Ra |
| LED FACADE UPDOWN 12 W 3000 K GY ¹⁾ | 12.00 W | 220...240 V | 0.055 A | Mains voltage | 50/60 Hz | >0.5 | 60 lm/W | 700 lm | 3000 K | Warm White | ≥80 |
| LED FACADE UPDOWN 12 W 3000 K WT ¹⁾ | 12.00 W | 220...240 V | 0.055 A | Mains voltage | 50/60 Hz | >0.5 | 60 lm/W | 710 lm | 3000 K | Warm White | ≥80 |


| Product description | Standard deviation of color matching | Light technical data | Dimensions & weight | | | Colors & materials | Temperatures & operating conditions | Lifespan | |
|--|--------------------------------------|----------------------|---------------------|---------|----------|--------------------|-------------------------------------|----------------------------|-----------------------|
| | | Beam angle | Length | Width | Height | Product color | Ambient temperature range | Number of switching cycles | Lifespan L70 at 25 °C |
| LED FACADE UPDOWN 12 W 3000 K GY ¹⁾ | <6 sdcM | 280.00 ° | 55.0 mm | 90.0 mm | 160.0 mm | Gray | -20...40 °C | 15000 | 30000 h |
| LED FACADE UPDOWN 12 W 3000 K WT ¹⁾ | <6 sdcM | 280.00 ° | 55.0 mm | 90.0 mm | 160.0 mm | White | -20...40 °C | 15000 | 30000 h |

| Product description | Additional product data | Capabilities | | | Certificates & standards | | |
|--|-------------------------|--------------|------------------------|-----------------------------|--------------------------|------------------|--|
| | Mounting location | Dimmable | LED module replaceable | Type of connection | Type of protection | Protection class | Protection class IK (shock resistance) |
| LED FACADE UPDOWN 12 W 3000 K GY ¹⁾ | Wall | No | Not replaceable | Terminal, 3-Pole (L, N, PE) | IP54 | I | IK06 |
| LED FACADE UPDOWN 12 W 3000 K WT ¹⁾ | Wall | No | Not replaceable | Terminal, 3-Pole (L, N, PE) | IP54 | I | IK06 |

| Product description | Photobiological safety group | Standards |
|--|------------------------------|-----------|
| LED FACADE UPDOWN 12 W 3000 K GY ¹⁾ | RG 0 | CE |

| Product description | Photobiological safety group | Standards |
|--|------------------------------|-----------|
| LED FACADE UPDOWN 12 W 3000 K WT ¹⁾ | RG 0 | CE |

¹⁾ Available from February 2018

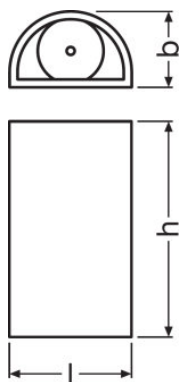

LED FACADE UPDOWN 12 W 3000 K GY,
LED FACADE UPDOWN 12 W 3000 K WT

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|----------------------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4058075075054 | LED FACADE UPDOWN 12 W 3000 K GY | Shipping carton box 6 | 245 mm x 240 mm x 195 mm | 11.47 dm ³ | 3193.00 g |
| 4058075075078 | LED FACADE UPDOWN 12 W 3000 K WT | Shipping carton box 6 | 245 mm x 240 mm x 195 mm | 11.47 dm ³ | 3193.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.