
EASY PB Coupler | Control units for light management systems



- Installation in a flush-type box


Product features

- Pushbutton coupler for connection to EASY control units
- 8 inputs for floating make contacts
- Group and scene control, central switching and dimming, sequencer start/stop
- Floating contacts of motion sensors or timer switches can be connected
- Up to 2 EASY pushbutton couplers can be connected to the overall system

Technical data

Dimensions & weight

Length	47.0 mm
Height	13.0 mm
Width	44.0 mm

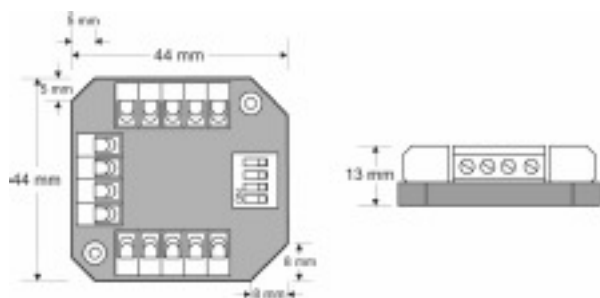

Product line drawing with numbers

Temperatures

Ambient temperature range	0...+50 °C
----------------------------------	------------

Capabilities

Dimming interface	EASY
--------------------------	------

Certificates & standards

Type of protection	IP20
--------------------	------

Equipment / Accessories

- Connection via Y-connector for multiple control units (included)

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321915597	Folding carton box 1	65 mm x 30 mm x 153 mm	103.50 g	0.30 dm ³
4008321915603	Shipping carton box 25	160 mm x 174 mm x 340 mm	2760.75 g	9.47 dm ³

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.