

## LEDVANCE® Downlight 25W

Indoor luminaires | LED downlight | Ceiling cut-out: 200mm



### Area of application

- General illumination
- Public areas
- Stairways
- Corridors
- Foyers
- Shops


### Product benefits

- Luminaire efficacy: up to 100 lm/W
- Luminous flux: up to 2440lm
- Diameter of required ceiling cut-out: 200mm
- Available with colour temperature: 3000K, 4000K, 6500K
- Beam angle: 100°
- Type of protection: IP20
- Ambient operating temperature: -20...+45 °C
- Lifetime (L70/B50): up to 30000h
- 3-years guarantee

### Product features

- Direct replacement for Downlight with conventional 2x26W CFL
- Design matches the LEDVANCE SPOT luminaire family
- Energy savings up to 60% (compared to 2x26W CFL luminaires)
- Very homogenous light
- Functional design
- Easy installation with fast connection
- Certification marks including TÜV SÜD, CE, CB
- External driver for extended flexibility (compatible with recommended DALI drivers)

## Technical data

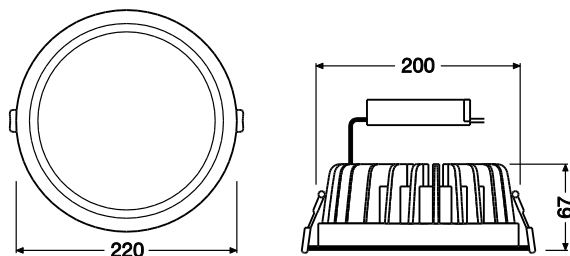

Product description	GTIN (EAN)	Nominal wattage [W]	Nominal voltage [V]	Power factor [λ]	Luminous flux [lm]	Luminaire efficacy [lm/W]	Colour temperature [K]	CRI index [Ra]
Downlight LED 25W/3000K 230V IP20	4058075000063	25W	230V	> 0.9	2220	90	3000K	>80
Downlight LED 25W/4000K 230V IP20	4058075000087	25W	230V	> 0.9	2340	95	4000K	>80
Downlight LED 25W/6500K 230V IP20	4058075000100	25W	230V	> 0.9	2440	100	6500K	>80

Product description	Beam angle	Rated life time L70 / B50 [h]	Type of protection IP rating	Protection class	Product size l x w or Ø [mm]	Height h [mm]	Body colour
Downlight LED 25W/3000K 230V IP20	100°	30000	20	II	Ø220	67	white
Downlight LED 25W/4000K 230V IP20	100°	30000	20	II	Ø220	67	white
Downlight LED 25W/6500K 230V IP20	100°	30000	20	II	Ø220	67	white

## Packaging information

Product description	GTIN (EAN)	Dimensions EAN10 l x w x h [mm]	Gross weight EAN 10 [g]	Volume [dm <sup>3</sup> ]	Packaging unit [Pieces/unit]
Downlight LED 25W/3000K 230V IP20	4058075000063	225 x 225 x 110	1386	6.90	8
Downlight LED 25W/4000K 230V IP20	4058075000087	225 x 225 x 110	1387	6.90	8
Downlight LED 25W/6500K 230V IP20	4058075000100	225 x 225 x 110	1388	6.90	8

## Recommended DALI drivers (not included)

Product description	GTIN (EAN)	Nominal Wattage [W]	Voltage in [V AC]	Voltage out [V DC]	Current out [mA DC]	Driver EAN10	Driver product description
Downlight LED 25W/3000K 230V IP20	4058075000063	25W	200-240V	27-42V	600	4052899919457	OTI DALI 25/220...240/700 LT2
Downlight LED 25W/4000K 230V IP20	4058075000087	25W	200-240V	27-42V	600	4052899919457	OTI DALI 25/220...240/700 LT2
Downlight LED 25W/6500K 230V IP20	4058075000100	25W	200-240V	27-42V	600	4052899919457	OTI DALI 25/220...240/700 LT2

Recommended cable clamp for DALI driver: either OT CABLE CLAMP B-STYLE, GTIN (EAN): 4052899077881 or OT CABLE CLAMP B-STYLE TL, GTIN (EAN): 4052899948051

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.