

OPTOTRONIC OTe 90/220-240/4x350 E

Constant current ECG 350 mA for LED modules




- Outdoor applications

Product benefits

- Large output power range: up to 81 W
- High surge protection: up to 3 kV (L-N) / 3.5 kV (L/N-PE)
- Robust and reliable design
- Doubling of the output current by connecting two channels in parallel

Product features

- 4 output channels each with low output voltage: < 60 V

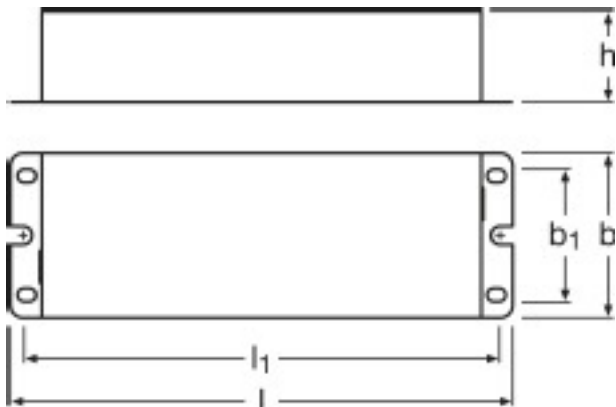

Product line drawing with letters

Technical data

Product description	Nominal current	Ambient temperature range	Input voltage	Nominal voltage	Output current	Mains frequency
	0.40 A ¹⁾	-25...+55 °C	198...264 V ²⁾	220...240 V	350 mA ³⁾	50/60 Hz

Product description	Output voltage	Maximum temperature at tc test point	Maximum wiring length ECG/lamp	Approval marks – approval
	58 V ⁴⁾	70 °C ⁵⁾	10 m	CE

¹⁾ At 230 V

²⁾ Permitted voltage range

³⁾ 4 x 350 mA or 2 x 700 mA

⁴⁾ Maximum

⁵⁾ Maximum at the Tc-point

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.