

OPTOTRONIC OTe 60/220-240/12 P

Constant voltage ECG 12 V for LED modules




- Suitable for outdoor applications

Product benefits

- High IP protection (IP65)
- Compact housing

Product features

- SELV equivalent
- Suitable for luminaires of protection class I
- Surge protection: ≥ 2 kV

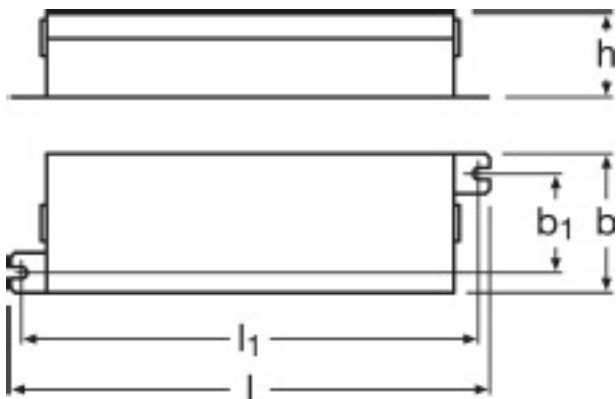

Product line drawing with letters
OTe

Technical data

Product description	Nominal current	Ambient temperature range	Input voltage	Nominal voltage	Mains frequency	Output voltage
OTe	0.40 A ¹⁾	-25...+55 °C	198...264 V ²⁾	220...240 V	50/60 Hz	12.5 V ³⁾

Product description	Maximum temperature at tc test point	Maximum wiring length ECG/lamp	Length
OTe	90 °C ⁴⁾	10 m	170.0 mm

¹⁾ At 230 V

²⁾ Permitted voltage range

³⁾ ±0.5 V

⁴⁾ Maximum at the Tc-point

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.