

PRODUCT FAMILY DATASHEET

LEDVANCE OUTDOOR LED FACADE SPOT

Luminaires with rotatable head and directional light



AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Adjustable modules: rotation angle 320°
- Diffuser made of opal polycarbonate
- Available in two housing colors: white and dark gray



TECHNICAL DATA


Product description	Electrical data						Photometrical data				
	Nominal wattage	Nominal voltage	Nominal current	Operating mode	Mains frequency	Power factor λ	Luminous efficacy	Luminous flux	Color temperature	Light color (designation)	Color rendering index Ra
LED FACADE SPOT 8 W 3000 K GY ¹⁾	8.00 W	220...240 V	0.066 A	Mains voltage	50/60 Hz	>0.5	55 lm/W	440 lm	3000 K	Warm White	≥80
LED FACADE SPOT 8 W 3000 K WT ¹⁾	8.00 W	220...240 V	0.066 A	Mains voltage	50/60 Hz	>0.5	60 lm/W	460 lm	3000 K	Warm White	≥80

Product description	Standard deviation of color matching	Light technical data	Dimensions & weight			Colors & materials	Temperatures & operating conditions	Lifespan	Additional product data
		Beam angle	Length	Width	Height	Product color	Ambient temperature range	Number of switching cycles	Mounting location
LED FACADE SPOT 8 W 3000 K GY ¹⁾	<6 sdcM	110 °	135.0 mm	90.0 mm	140.0 mm	Gray	-20...40 °C	15000	Wall
LED FACADE SPOT 8 W 3000 K WT ¹⁾	<6 sdcM	110 °	135.0 mm	90.0 mm	140.0 mm	White	-20...40 °C	15000	Wall

Product description	Capabilities			Certificates & standards			
	Dimmable	LED module replaceable	Type of connection	Type of protection	Protection class	Protection class IK (shock resistance)	Photobiological safety group
LED FACADE SPOT 8 W 3000 K GY ¹⁾	No	Not replaceable	Terminal, 3-Pole (L, N, PE)	IP54	I	IK06	RG 0
LED FACADE SPOT 8 W 3000 K WT ¹⁾	No	Not replaceable	Terminal, 3-Pole (L, N, PE)	IP54	I	IK06	RG 0

Product description	Standards
LED FACADE SPOT 8 W 3000 K GY ¹⁾	CE
LED FACADE SPOT 8 W 3000 K WT ¹⁾	CE

¹⁾ Available from February 2018

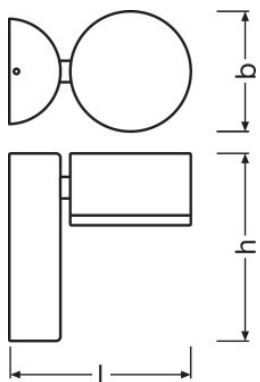

LED FACADE SPOT 8 W 3000 K GY, LED
FACADE SPOT 8 W 3000 K WT

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075074712	LED FACADE SPOT 8 W 3000 K GY	Shipping carton box 6	385 mm x 170 mm x 355 mm	23.23 dm ³	4072.00 g
4058075074736	LED FACADE SPOT 8 W 3000 K WT	Shipping carton box 6	385 mm x 170 mm x 355 mm	23.23 dm ³	4072.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.