

LINEARlight FLEX Protect ECO

LED modules for professional and industrial applications



Areas of application

- Decorative applications
- Wall integration
- Backlighting of complex structures
- Path lighting
- Signage
- Suitable for outdoor use

Product benefits

- Large selection of light colors
- Great design freedom thanks to flexibility and cuttability of module
- High-performance silicone for extremely long life and flexibility
- Simple connection thanks to premounted connectors
- Extraordinary design and high quality materials
- Toolless connection with the optional CONNECTsystem
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Product features

- Flexible and cuttable LED strip
- Luminous flux: up to 155 lm/m
- Type of protection: IP67
- Dimmable
- Fine White (3.5 SDCM)
- Salt mist proof
- Highly UV-resistant



Technical data

Electrical data

Product description	Nominal voltage	Nominal current	Rated wattage	Nominal wattage per meter	Reverse Voltage	Type of current
LF06E -830-P ¹⁾	24.0 V	0.8 A	20.00 W	2.0 W	25 V	DC
LF06E -840-P ¹⁾	24.0 V	0.8 A	20.00 W	2.0 W	25 V	DC
LF06E -880-P ¹⁾	24.0 V	0.8 A	20.00 W	2.0 W	25 V	DC
LFP200M -G3-BL-06	24.0 V	1.02 A	24.50 W	4.1 W	25 V	DC
LFP200M -G3-RE-06	24.0 V	1.5 A	36.00 W	6.0 W	25 V	DC
LFP200M -G3-GR-06	24.0 V	1.02 A	24.50 W	4.1 W	25 V	DC
LFP200M -G3-YE-06	24.0 V	1.5 A	36.00 W	6.0 W	25 V	DC
LF05E-P -W2F-830-P	24.0 V		24.00 W	4.1 W	25 V	DC
LF05E-P -W2F-840-P	24.0 V		24.00 W	4.1 W	25 V	DC
LF05E-P -W2F-860-P	24.0 V		24.00 W	4.1 W	25 V	DC
-B2-P ²⁾	24.0 V	1 A	24.00 W	4.1 W	25 V	DC
-R1-P ²⁾	24.0 V	1.5 A	36.00 W	6.0 W	25 V	DC
-T2-P ²⁾	24.0 V	1 A	24.00 W	4.1 W	25 V	DC
-Y1-P ²⁾	24.0 V	1.5 A	36.00 W	6.0 W	25 V	DC

Product description	Input voltage range
LF06E -830-P ¹⁾	23...25 V
LF06E -840-P ¹⁾	23...25 V
LF06E -880-P ¹⁾	23...25 V
LFP200M -G3-BL-06	23...25 V
LFP200M -G3-RE-06	23...25 V
LFP200M -G3-GR-06	23...25 V
LFP200M -G3-YE-06	23...25 V
LF05E-P -W2F-830-P	23...25 V
LF05E-P -W2F-840-P	23...25 V
LF05E-P -W2F-860-P	23...25 V
-B2-P ²⁾	23...25 V
-R1-P ²⁾	23...25 V
-T2-P ²⁾	23...25 V
-Y1-P ²⁾	23...25 V

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

Photometrical data

Product description	Color temperature	Color rendering index Ra	Light color (designation)	Light color LED	Nominal dominant wavelength	Luminous flux per meter
LF06E -830-P ¹⁾	3000 K	80	Warm White	White	-	190 lm
LF06E -840-P ¹⁾	4000 K	80	Cold White	White	-	200 lm
LF06E -880-P ¹⁾	8000 K	80	Cold White	White	-	190 lm
LFP200M -G3-BL-06	monochromatic K	-	Blue	Blue	467 nm	48 lm
LFP200M -G3-RE-06	monochromatic K	-	Red	Red	625 nm	140 lm
LFP200M -G3-GR-06	monochromatic K	-	Green	Green	522 nm	157 lm
LFP200M -G3-YE-06	monochromatic K	-	Yellow	Yellow	587 nm	140 lm
LF05E-P -W2F-830-P	3000 K	>80	Warm White	White	-	130 lm
LF05E-P -W2F-840-P	4000 K	>80	Cool White	White	-	157 lm
LF05E-P -W2F-860-P	6000 K	>80	Daylight	White	-	130 lm
-B2-P ²⁾			Blue	Blue	467 nm	50 lm
-R1-P ²⁾			Red	Red	625 nm	140 lm
-T2-P ²⁾			Green	Green	522 nm	157 lm
-Y1-P ²⁾			Yellow	Yellow	587 nm	140 lm

Product description	Luminous flux	Luminous efficacy
LF06E -830-P ¹⁾	1900 lm	95 lm/W
LF06E -840-P ¹⁾	2000 lm	100 lm/W
LF06E -880-P ¹⁾	2000 lm	100 lm/W
LFP200M -G3-BL-06	290 lm	12 lm/W ³⁾
LFP200M -G3-RE-06	840 lm	23 lm/W ³⁾
LFP200M -G3-GR-06	940 lm	38 lm/W ³⁾
LFP200M -G3-YE-06	840 lm	23 lm/W ³⁾
LF05E-P -W2F-830-P	770 lm	31 lm/W
LF05E-P -W2F-840-P	940 lm	38 lm/W
LF05E-P -W2F-860-P	770 lm	31 lm/W
-B2-P ²⁾	290 lm	
-R1-P ²⁾	840 lm	
-T2-P ²⁾	940 lm	
-Y1-P ²⁾	840 lm	

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

³⁾ For white color

Product family datasheet

Light technical data

Product description	Beam angle
LF06E -830-P ¹⁾	120 °
LF06E -840-P ¹⁾	120 °
LF06E -880-P ¹⁾	120 °
LFP200M -G3-BL-06	120 °
LFP200M -G3-RE-06	120 °
LFP200M -G3-GR-06	120 °
LFP200M -G3-YE-06	120 °
LF05E-P -W2F-830-P	120 °
LF05E-P -W2F-840-P	120 °
LF05E-P -W2F-860-P	120 °
-B2-P ²⁾	120 °
-R1-P ²⁾	120 °
-T2-P ²⁾	120 °
-Y1-P ²⁾	120 °

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

LED module information

Product description	Number of LEDs per module	Number of LEDs per meter	Number of LEDs per smallest unit
LF06E -830-P ¹⁾	600	60	6
LF06E -840-P ¹⁾	600	60	6
LF06E -880-P ¹⁾	600	60	6
LFP200M -G3-BL-06	200	33	5
LFP200M -G3-RE-06	200	33	5
LFP200M -G3-GR-06	200	33	5
LFP200M -G3-YE-06	200	33	5
LF05E-P -W2F-830-P	200	33	5
LF05E-P -W2F-840-P	200	33	5
LF05E-P -W2F-860-P	200	33	5
-B2-P ²⁾	200	33	5
-R1-P ²⁾	200	33	5
-T2-P ²⁾	200	33	5
-Y1-P ²⁾	200	33	5

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from

Product family datasheet

the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

Dimensions & weight

Product description	Length	Length – smallest unit	Width	Height	Cable length
LF06E -830-P ¹⁾	10000 mm	100.0 mm	11.0 mm	3.7 mm	500.0 mm
LF06E -840-P ¹⁾	10000 mm	100.0 mm	11.0 mm	3.7 mm	500.0 mm
LF06E -880-P ¹⁾	10000 mm	100.0 mm	11.0 mm	3.7 mm	500.0 mm
LFP200M -G3-BL-06	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm ⁴⁾	500.0 mm
LFP200M -G3-RE-06	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm ⁴⁾	500.0 mm
LFP200M -G3-GR-06	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm ⁴⁾	500.0 mm
LFP200M -G3-YE-06	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm ⁴⁾	500.0 mm
LF05E-P -W2F-830-P	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm	500.0 mm
LF05E-P -W2F-840-P	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm	500.0 mm
LF05E-P -W2F-860-P	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm	500.0 mm
-B2-P ²⁾	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm	500.0 mm
-R1-P ²⁾	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm	500.0 mm
-T2-P ²⁾	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm	500.0 mm
-Y1-P ²⁾	6000 mm ³⁾	150.0 mm	11.0 mm	4.5 mm	500.0 mm

Product description	Product weight
LF06E -830-P ¹⁾	470.00 g
LF06E -840-P ¹⁾	470.00 g
LF06E -880-P ¹⁾	470.00 g
LFP200M -G3-BL-06	500.00 g
LFP200M -G3-RE-06	500.00 g
LFP200M -G3-GR-06	500.00 g
LFP200M -G3-YE-06	500.00 g
LF05E-P -W2F-830-P	500.00 g
LF05E-P -W2F-840-P	500.00 g
LF05E-P -W2F-860-P	500.00 g
-B2-P ²⁾	500.00 g
-R1-P ²⁾	500.00 g
-T2-P ²⁾	500.00 g
-Y1-P ²⁾	500.00 g

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values


²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

³⁾ LED pitch 30 mm


Product family datasheet

4) without tape

Product line drawing

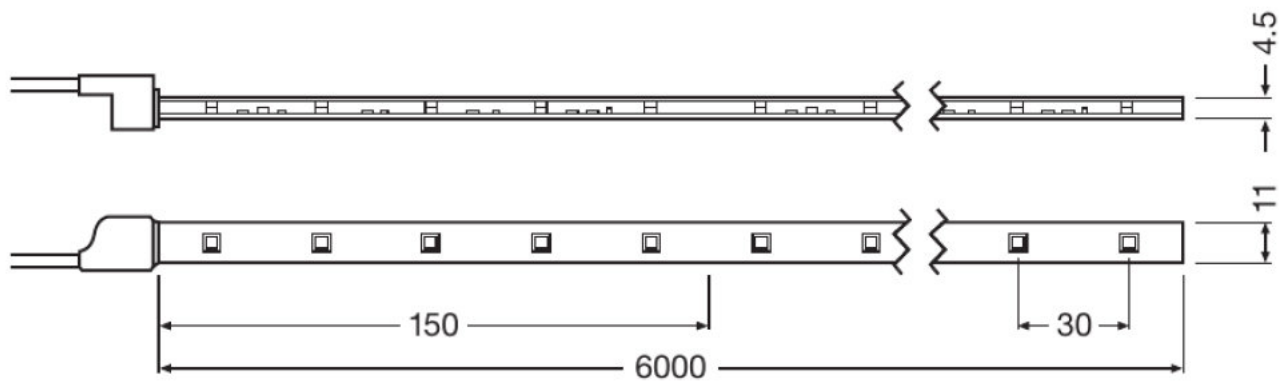

LF06E -830-P, LF06E -840-P, LF06E -880-P, LF05E-P -W2F-830-P, LF05E-P -W2F-840-P, LF05E-P -W2F-860-P, -B2-P, -R1-P, -T2-P, -Y1-P

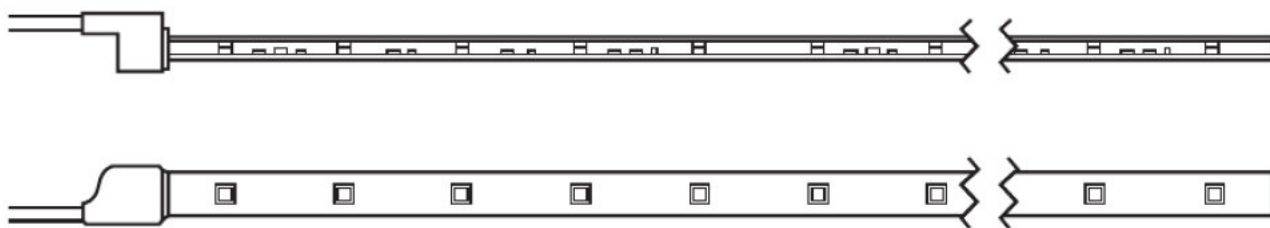

LFP200M -G3-BL-06, LFP200M -G3-RE-06, LFP200M -G3-GR-06, LFP200M -G3-YE-06

Colors & materials

Product description	Cover material	Body material
LF06E -830-P ¹⁾	Silicone	Silicone
LF06E -840-P ¹⁾	Silicone	Silicone
LF06E -880-P ¹⁾	Silicone	Silicone
LFP200M -G3-BL-06	Silicone	Silicone
LFP200M -G3-RE-06	Silicone	Silicone
LFP200M -G3-GR-06	Silicone	Silicone
LFP200M -G3-YE-06	Silicone	Silicone
LF05E-P -W2F-830-P	Silicone	Silicone
LF05E-P -W2F-840-P	Silicone	Silicone
LF05E-P -W2F-860-P	Silicone	Silicone
-B2-P ²⁾	Silicone	Silicone
-R1-P ²⁾	Silicone	Silicone
-T2-P ²⁾	Silicone	Silicone
-Y1-P ²⁾	Silicone	Silicone

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

Temperatures & operating conditions

Product description	Temperature range in operation
LF06E -830-P ¹⁾	-20...70 °C
LF06E -840-P ¹⁾	-20...70 °C
LF06E -880-P ¹⁾	-20...70 °C
LFP200M -G3-BL-06	-20...70 °C ³⁾
LFP200M -G3-RE-06	-20...70 °C ³⁾
LFP200M -G3-GR-06	-20...70 °C ³⁾
LFP200M -G3-YE-06	-20...70 °C ³⁾
LF05E-P -W2F-830-P	-30...75 °C ³⁾
LF05E-P -W2F-840-P	-30...75 °C ³⁾
LF05E-P -W2F-860-P	-30...75 °C ³⁾
-B2-P ²⁾	-30...75 °C ³⁾
-R1-P ²⁾	-30...75 °C ³⁾
-T2-P ²⁾	-30...75 °C ³⁾
-Y1-P ²⁾	-30...75 °C ³⁾

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

Product family datasheet

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

³⁾ At the T_c point

Lifespan

Product description	Lifespan
LF06E -830-P ¹⁾	50000 h ³⁾
LF06E -840-P ¹⁾	50000 h ³⁾
LF06E -880-P ¹⁾	50000 h ³⁾
LFP200M -G3-BL-06	50000 h ³⁾
LFP200M -G3-RE-06	50000 h ³⁾
LFP200M -G3-GR-06	50000 h ³⁾
LFP200M -G3-YE-06	50000 h ³⁾
LF05E-P -W2F-830-P	50000 h ³⁾
LF05E-P -W2F-840-P	50000 h ³⁾
LF05E-P -W2F-860-P	50000 h ³⁾
-B2-P ²⁾	50000 h ³⁾
-R1-P ²⁾	50000 h ³⁾
-T2-P ²⁾	50000 h ³⁾
-Y1-P ²⁾	50000 h ³⁾

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

³⁾ L70/B50 at T_c 40 °C

Product family datasheet

Capabilities

Product description	Dimmable
LF06E -830-P ¹⁾	Yes
LF06E -840-P ¹⁾	Yes
LF06E -880-P ¹⁾	Yes
LFP200M -G3-BL-06	Yes
LFP200M -G3-RE-06	Yes
LFP200M -G3-GR-06	Yes
LFP200M -G3-YE-06	Yes
LF05E-P -W2F-830-P	Yes
LF05E-P -W2F-840-P	Yes
LF05E-P -W2F-860-P	Yes
-B2-P ²⁾	Yes ³⁾
-R1-P ²⁾	Yes ³⁾
-T2-P ²⁾	Yes ³⁾
-Y1-P ²⁾	Yes ³⁾

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

³⁾ PWM

Certificates & standards

Product description	Energy consumption	Type of protection	Energy efficiency class
LF06E -830-P ¹⁾	22 kWh/1000h	IP67	A++ ³⁾
LF06E -840-P ¹⁾	22 kWh/1000h	IP67	A++ ³⁾
LF06E -880-P ¹⁾	22 kWh/1000h	IP67	A++ ³⁾
LFP200M -G3-BL-06		IP67	
LFP200M -G3-RE-06		IP67	
LFP200M -G3-GR-06		IP67	
LFP200M -G3-YE-06		IP67	
LF05E-P -W2F-830-P	1 kWh/1000h	IP67	A+
LF05E-P -W2F-840-P	1 kWh/1000h	IP67	A+
LF05E-P -W2F-860-P	1 kWh/1000h	IP67	A+
-B2-P ²⁾		IP67	
-R1-P ²⁾		IP67	
-T2-P ²⁾		IP67	
-Y1-P ²⁾		IP67	
Product description	Standards		
LF06E -830-P ¹⁾	UL/CE/ENEC/EAC/ENEC+		

Product family datasheet

Product description	Standards
LF06E -840-P ¹⁾	UL/CE/ENEC/EAC/ENEC+
LF06E -880-P ¹⁾	UL/CE/ENEC/EAC/ENEC+
LFP200M -G3-BL-06	CE/UL/EAC
LFP200M -G3-RE-06	CE/UL/EAC
LFP200M -G3-GR-06	CE/UL/EAC
LFP200M -G3-YE-06	CE/UL/EAC
LF05E-P -W2F-830-P	Acc. to EN 60598-1
LF05E-P -W2F-840-P	Acc. to EN 60598-1
LF05E-P -W2F-860-P	Acc. to EN 60598-1
-B2-P ²⁾	Acc. to EN 60598-1
-R1-P ²⁾	Acc. to EN 60598-1
-T2-P ²⁾	Acc. to EN 60598-1
-Y1-P ²⁾	Acc. to EN 60598-1

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

³⁾ Applicable on smallest operable unit

Logistical data

Product description	Temperature range at storage
LF06E -830-P ¹⁾	-40...85 °C
LF06E -840-P ¹⁾	-40...85 °C
LF06E -880-P ¹⁾	-40...85 °C
LFP200M -G3-BL-06	-40...85 °C
LFP200M -G3-RE-06	-40...85 °C
LFP200M -G3-GR-06	-40...85 °C
LFP200M -G3-YE-06	-40...85 °C
LF05E-P -W2F-830-P	-40...85 °C
LF05E-P -W2F-840-P	-40...85 °C
LF05E-P -W2F-860-P	-40...85 °C
-B2-P ²⁾	-40...85 °C
-R1-P ²⁾	-40...85 °C
-T2-P ²⁾	-40...85 °C
-Y1-P ²⁾	-40...85 °C

¹⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

²⁾ Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

Product family datasheet

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Quick installation with optional SLIM TRACK System
- Perfectly matched to OPTOTRONIC 24 V electronic control gears

Application advice

For more detailed application information and graphics please see product datasheet.






Sales and Technical Support

Sales and Technical Support www.osram.com














Country specific information

Product description	Product code	METEL code	SEG-No.	STK number	UK Org
LF05E-P -W2F-830-P	4008321616432	OSRLF05EW2F830P	-	4031364	-
LF05E-P -W2F-840-P	4008321621184	OSRLF05EW2F840P	-	4030005	-
LF05E-P -W2F-860-P	4008321616777	OSRLF05EW2F860P	-	4031363	-
-B2-P	4008321616913	OSRLF05EB2P	-	4031368	-
-R1-P	4008321616937	OSRLF05ER1P	-	4031365	-
-T2-P	4008321616951	OSRLF05ET2P	-	4031367	-
-Y1-P	4008321616975	OSRLF05EY1P	-	4031366	-

Download Data

File
 Brochures Light is freedom of design (EN)
 Certificates UL Certificate
 Declarations of conformity Declaration of conformity LINEARlight FLEX Protect ADVANCED & ECO
 Declarations of conformity Manufacturer's Declaration of conformity LINEARlight FLEX Protect ADVANCED & ECO
 Declarations of conformity Manufacturers Declaration
 Declarations of conformity Declaration of Conformity
 Eulumdat Eulumdat LF06E-830-P

Product family datasheet

	IES data IES Data LF06E-830-P
	Eulumdat Eulumdat LF06E-840-P
	IES data IES Data LF06E-840-P
	Eulumdat Eulumdat LF06E-880-P
	IES data IES Data LF06E-880-P
	Certificates UL Certificate
	Declarations of conformity Manufacturers Decalration LFP200M G3
	Declarations of conformity Declaration of Conformity LFP200M G3
	Product Datasheet 335840_LINEARlight Flex Protect LF05E-P (EN)
	Declarations of conformity 466011_EC-DoC LF05A-E-P
	Eulumdat 327793_LINEARlight FLEX PROTECT LF05E-W2F-830-P
	Eulumdat 327794_LINEARlight FLEX PROTECT LF05E-W2F-840-P
	Eulumdat 327795_LINEARlight FLEX PROTECT LF05E-W2F-860-P
	Eulumdat 327790_LINEARlight FLEX PROTECT LF05E-B2-P
	Eulumdat 327791_LINEARlight FLEX PROTECT LF05E-R1-P
	Eulumdat 327792_LINEARlight FLEX PROTECT LF05E-T2-P
	Eulumdat 327796_LINEARlight FLEX PROTECT LF05E-Y1-P

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899475724	LF06E -830-P	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	7978.00 g
4052899475809	LF06E -840-P	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	7978.00 g
4052899475847	LF06E -880-P	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	7978.00 g

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899500525	LFP200M -G3-BL-06	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	8218.00 g
4052899500549	LFP200M -G3-RE-06	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	8218.00 g
4052899500563	LFP200M -G3-GR-06	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	8218.00 g
4052899500587	LFP200M -G3-YE-06	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	8218.00 g
4008321616432	LF05E-P -W2F-830-P	Shipping carton box 8	366 mm x 369 mm x 286 mm	38.63 dm ³	7199.67 g
4008321621184	LF05E-P -W2F-840-P	Shipping carton box 8	366 mm x 315 mm x 365 mm	42.08 dm ³	6932.00 g
4008321616777	LF05E-P -W2F-860-P	Shipping carton box 8	366 mm x 366 mm x 286 mm	38.31 dm ³	8150.00 g
4008321616913	-B2-P	Shipping carton box 8	366 mm x 366 mm x 286 mm	38.31 dm ³	8150.00 g
4008321616937	-R1-P	Shipping carton box 8	366 mm x 366 mm x 286 mm	38.31 dm ³	8150.00 g
4008321616951	-T2-P	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	8150.00 g
4008321616975	-Y1-P	Shipping carton box 8	365 mm x 286 mm x 366 mm	38.21 dm ³	8150.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
LF06E -830-P	LINEARlight FLEX, -SC08-G2-C2PF-IP54-0500	▶ 4052899464902
LF06E -830-P	LINEARlight FLEX, -SC08-G2-C2PF-IP54-0500	▶ 4052899488250
LF06E -830-P	LINEARlight FLEX, -SC08-G2--BTJ-IP54	▶ 4052899568877
LF06E -840-P	LINEARlight FLEX, -SC08-G2-C2PF-IP54-0500	▶ 4052899464902
LF06E -840-P	LINEARlight FLEX, -SC08-G2-C2PF-IP54-0500	▶ 4052899488250
LF06E -840-P	LINEARlight FLEX, -SC08-G2--BTJ-IP54	▶ 4052899568877
LF06E -880-P	LINEARlight FLEX, -SC08-G2-C2PF-IP54-0500	▶ 4052899464902
LF06E -880-P	LINEARlight FLEX, -SC08-G2-C2PF-IP54-0500	▶ 4052899488250
LF06E -880-P	LINEARlight FLEX, -SC08-G2--BTJ-IP54	▶ 4052899568877
LF05E-P -W2F-830-P	LINEARlight FLEX Protect, -2PIN Protect	▶ 4008321977113
LF05E-P -W2F-830-P	LINEARlight FLEX Protect, -2CONN Protect	▶ 4008321977137
LF05E-P -W2F-830-P	LINEARlight FLEX Protect, -ENDCAP Protect	▶ 4008321977151
		▶

Product family datasheet

LF05E-P -W2F-830-P	LINEARlight FLEX Protect, -FIXTURE PROTECT	4008321644756
LF05E-P -W2F-830-P	LINEARlight FLEX, -2100	▶ 4008321978998
LF05E-P -W2F-840-P	LINEARlight FLEX Protect, -2PIN Protect	▶ 4008321977113
LF05E-P -W2F-840-P	LINEARlight FLEX Protect, -2CONN Protect	▶ 4008321977137
LF05E-P -W2F-840-P	LINEARlight FLEX Protect, -ENDCAP Protect	▶ 4008321977151
LF05E-P -W2F-840-P	LINEARlight FLEX Protect, -FIXTURE PROTECT	▶ 4008321644756
LF05E-P -W2F-840-P	LINEARlight FLEX, -2100	▶ 4008321978998
LF05E-P -W2F-860-P	LINEARlight FLEX Protect, -2PIN Protect	▶ 4008321977113
LF05E-P -W2F-860-P	LINEARlight FLEX Protect, -2CONN Protect	▶ 4008321977137
LF05E-P -W2F-860-P	LINEARlight FLEX Protect, -ENDCAP Protect	▶ 4008321977151
LF05E-P -W2F-860-P	LINEARlight FLEX Protect, -FIXTURE PROTECT	▶ 4008321644756
LF05E-P -W2F-860-P	LINEARlight FLEX, -2100	▶ 4008321978998
-B2-P	LINEARlight FLEX Protect, -2PIN Protect	▶ 4008321977113
-B2-P	LINEARlight FLEX Protect, -2CONN Protect	▶ 4008321977137
-B2-P	LINEARlight FLEX Protect, -ENDCAP Protect	▶ 4008321977151
-B2-P	LINEARlight FLEX Protect, -FIXTURE PROTECT	▶ 4008321644756
-B2-P	LINEARlight FLEX, -2100	▶ 4008321978998
-R1-P	LINEARlight FLEX Protect, -2PIN Protect	▶ 4008321977113
-R1-P	LINEARlight FLEX Protect, -2CONN Protect	▶ 4008321977137
-R1-P	LINEARlight FLEX Protect, -ENDCAP Protect	▶ 4008321977151
-R1-P	LINEARlight FLEX Protect, -FIXTURE PROTECT	▶ 4008321644756
-R1-P	LINEARlight FLEX, -2100	▶ 4008321978998
-T2-P	LINEARlight FLEX Protect, -2PIN Protect	▶ 4008321977113
-T2-P	LINEARlight FLEX Protect, -2CONN Protect	▶ 4008321977137
-T2-P	LINEARlight FLEX Protect, -ENDCAP Protect	▶ 4008321977151
-T2-P	LINEARlight FLEX Protect, -FIXTURE PROTECT	▶ 4008321644756
-T2-P	LINEARlight FLEX, -2100	▶ 4008321978998
-Y1-P	LINEARlight FLEX Protect, -2PIN Protect	▶ 4008321977113
-Y1-P	LINEARlight FLEX Protect, -2CONN Protect	▶ 4008321977137
-Y1-P	LINEARlight FLEX Protect, -ENDCAP Protect	▶ 4008321977151
-Y1-P	LINEARlight FLEX Protect, -FIXTURE PROTECT	▶ 4008321644756
-Y1-P	LINEARlight FLEX, -2100	▶ 4008321978998

References / Links

System configurator tool is available online at <https://flex.osram.info/en/flex-configurator>

Disclaimer

Product family datasheet

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.