

---

## DALI EASY SO | Control units for light management systems



- Shop lighting
- Restaurants
- Health and fitness areas

---

### Product benefits

- Instant lamp starting from standby
- Basic setup without software

---

### Product features

- Control of switchable and dimmable lighting
- Control of lighting scenes and sequences (recall/store)
- 4 DALI lines
- Output relay (3A)
- 2 inputs for floating contacts (on/off/dimming and time switch)
- Integrated load contact for disconnecting the ECG from line supply
- Automatic scene recall and scene run
- Expandable to up to 64 devices

## Technical data


---

### Electrical data

System wattage	10 W
Nominal voltage	110...240 V
Mains frequency	50/60 Hz

### Dimensions & weight

Length	96.0 mm
Height	62.0 mm
Width	108.0 mm

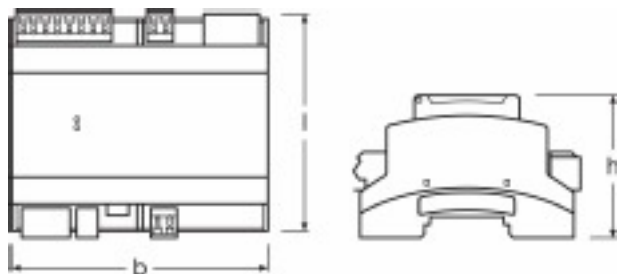

---

*Product line drawing with letters*

### Temperatures

Ambient temperature range	0...+50 °C
---------------------------	------------

**Capabilities**

<b>Dimming interface</b>	DALI / EASY
<b>Type of installation</b>	DIN rail mounting
<b>Number of control outputs</b>	4

**Certificates & standards**

<b>Type of protection</b>	IP20
---------------------------	------

## Equipment / Accessories

---

- Suitable for up to 32 Electronic Control Gears
- Suitable for EASY user interfaces / control units
- Suitable DALI REPEATER, DALI CONV and DALI SWITCH

**Logistical Data**

---

<b>Product code</b>	<b>Packaging unit (Pieces/Unit)</b>	<b>Dimensions (height x width x length)</b>	<b>Gross weight</b>	<b>Volume</b>
4008321691040	Folding carton box 1	111 mm x 82 mm x 119 mm	337.00 g	1.08 dm <sup>3</sup>
4008321691057	Shipping carton box 6	237 mm x 102 mm x 371 mm	2188.00 g	8.97 dm <sup>3</sup>

---

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.