

## OPTOTRONIC OT 9/200-240/350 DIM

---

Power supplies for LED modules



- Suitable for indoor applications

### Product benefits


---

- Compact housing

### Product features

---

- SELV equivalent
- Dimmable via external potentiometer
- Cable clamp housing for independent mounting
- 10 V control port

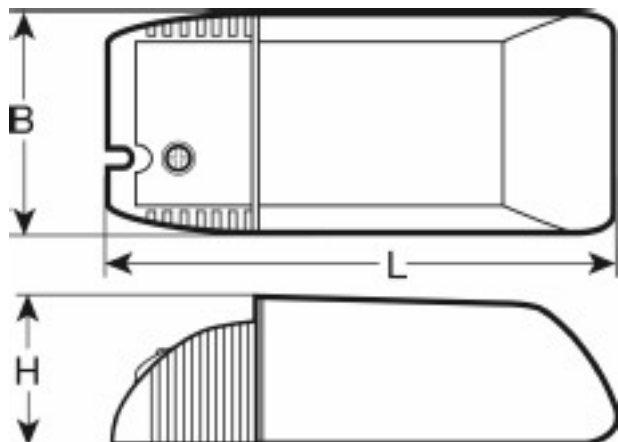

*Product line drawing with letters*

## Technical data

Product description	Nominal current	Ambient temperature range	Input voltage	Nominal voltage	Output current	Mains frequency
	0.10 A <sup>1)</sup>	-20...+55 °C	180...254 V <sup>2)</sup>	200...240 V	0...350 mA <sup>3)</sup>	50/60 Hz

Product description	Output voltage	Dimming interface	Dimming range	Maximum temperature at tc test point
	2.0...25 V <sup>4)</sup>	1...10 V	0...100 %	70 °C <sup>5)</sup>

1) At 230 V

2) Permitted voltage range

3) ±5 %

4) Maximum <30 V

5) Maximum at the Tc-point

## **Safety advice**

---

10 V control port not isolated

## **Application advice**

---

For more detailed application information and graphics please see product datasheet.

## **Disclaimer**

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.