
DALI EASY III | Control units for light management systems



Product features

- Lighting control unit with 4 DALI broadcast outputs
- Integrated sequencer for up to 4 different sequences
- Up to 16 different RGB(W) lighting scenes can be configured with cross-fade times
- Up to 16 static lighting scenes can be stored and retrieved
- Up to 64 controllers can be synchronized


Technical data

Electrical data

System wattage	3 W
Nominal voltage	100...240 V
Mains frequency	50/60 Hz

Dimensions & weight

Length	189.0 mm
Height	21.0 mm
Width	30.0 mm

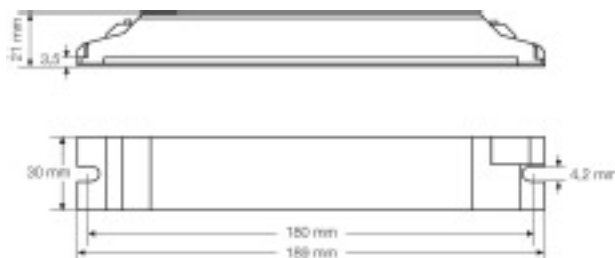

Product line drawing with numbers

Temperatures

Ambient temperature range	0...+50 °C
---------------------------	------------

Capabilities

Dimming interface	DALI / EASY
Type of installation	Luminaire integration
Number of control outputs	4

Certificates & standards

Type of protection	IP20
---------------------------	------

Equipment / Accessories

- Suitable for up to 32 Electronic DALI Control Gears with DALI dimming interface
- Independent installation in connection with LMS CI BOX

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321053046	Folding carton box 1	43 mm x 35 mm x 215 mm	131.63 g	0.32 dm ³
4008321053053	Shipping carton box 25	217 mm x 180 mm x 217 mm	3387.13 g	8.48 dm ³

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.