

OPTOTRONIC OTe 35/220-240/700

Constant current ECG 700 mA for LED modules




- Suitable for indoor applications

Product benefits

- Large output power range: up to 35 W

Product features

- SELV equivalent
- Cable clamp housing for independent mounting

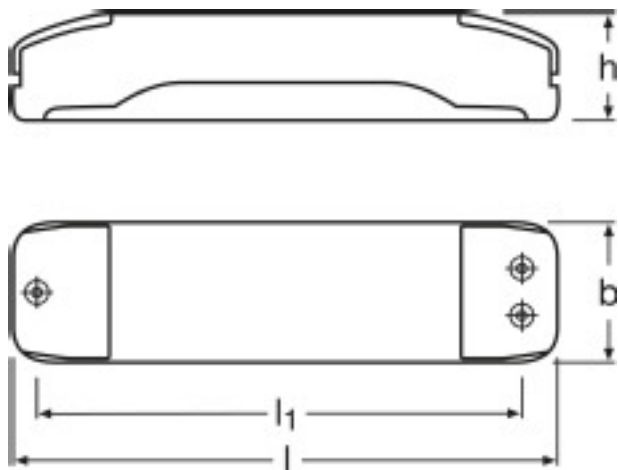

Product line drawing with letters

Technical data

| Product description | Nominal current | Ambient temperature range | Input voltage | Nominal voltage | Output current | Mains frequency |
|---------------------|----------------------|---------------------------|---------------------------|-----------------|----------------------|-----------------|
| | 0.21 A ¹⁾ | -20...+45 °C | 195...264 V ²⁾ | 220...240 V | 700 mA ³⁾ | 50/60 Hz |

| Product description | Output voltage | Maximum temperature at tc test point | Maximum wiring length ECG/lamp |
|---------------------|-------------------------|--------------------------------------|--------------------------------|
| | 25...50 V ⁴⁾ | 75 °C ⁵⁾ | 2.0 m |

¹⁾ Maximum at 230 V

²⁾ Permitted voltage range

³⁾ ±10 %

⁴⁾ Maximum 60 V

⁵⁾ Maximum at the Tc-point

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.