

OPTOTRONIC OT 9/200-240/350

Constant current ECG 350 mA for LED modules




- Suitable for installation in flush-type boxes
- Suitable for indoor applications

Product benefits

- Compact housing

Product features

- SELV equivalent

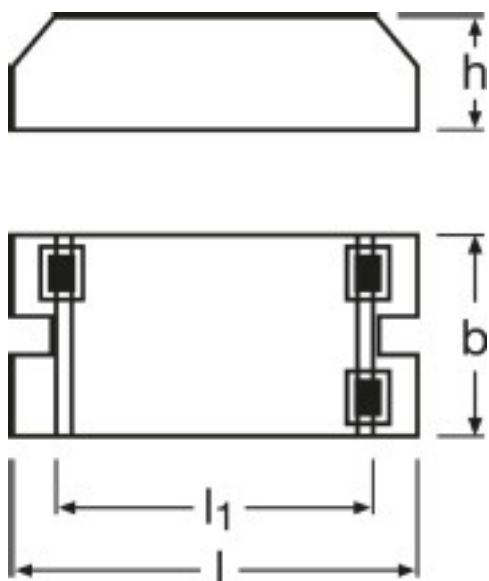

Product line drawing with letters

Technical data

Product description	Nominal current	Ambient temperature range	Input voltage	Nominal voltage	Output current	Mains frequency
	0.10 A	-20...+50 °C	180...254 V ¹⁾	200...240 V	350 mA ²⁾	50/60 Hz

Product description	Output voltage	Maximum temperature at tc test point	Maximum wiring length ECG/lamp
	1.8...25 V	80 °C	10 m ³⁾

¹⁾ Permitted voltage range

²⁾ ±5 %

³⁾ With 1.5 mm² massive leads for class II luminaires; 80 cm for class I luminaires

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.