

## LINEARlight FLEX ECO

LED modules for professional and industrial applications



### Areas of application

- Signage

### Product benefits

- Very long for seamless bands of light
- Large selection of light colors
- Great design freedom thanks to flexibility and cuttability of module
- Simple mounting and connection
- Toolless connection with the optional CONNECTsystem
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

### Product features

- Flexible and cuttable LED strip
- Luminous flux: up to 240 lm/m
- Dimmable
- Fine White (3 SDCM)



## Technical data

### Electrical data

Product description	Nominal voltage	Nominal current	Rated wattage	Reverse Voltage	Type of current	Input voltage range
LF200 -G3-827-10	24.0 V	0.76 A	18.24 W	25 V	DC	23...25 V
LF200 -G3-830-10	24.0 V	0.76 A	18.24 W	25 V	DC	23...25 V
LF200 -G3-840-10	24.0 V	0.69 A	16.56 W	25 V	DC	23...25 V
LF200 -G3-865-10	24.0 V	0.69 A	16.56 W	25 V	DC	23...25 V
LF200M -G3-BL-06	24.0 V	1.02 A	24.50 W	25 V	DC	23...25 V
LF200M -G3-YE-06	24.0 V	1.5 A	36.00 W	25 V	DC	23...25 V
LF200M -G3-RE-06	24.0 V	1.5 A	36.00 W	25 V	DC	23...25 V
LF200M -G3-GR-06	24.0 V	1.02 A	24.50 W	25 V	DC	23...25 V
LF05E2 -W2F-824	24.0 V	1.3 A	30.00 W	25 V	DC	23...25 V
LF05E2 -W2F-827 <sup>1)</sup>	24.0 V	1.5 A	36.00 W	25 V	DC	23...25 V
LF05E2 -W2F-830	24.0 V	1.5 A	36.00 W	25 V	DC	23...25 V
LF05E2 -W2F-840 <sup>2)</sup>	24.0 V	1.5 A	36.00 W	25 V	DC	23...25 V
LF05E2 -W2F-865 <sup>2)</sup>	24.0 V	1.5 A	36.00 W	25 V	DC	23...25 V
LF05E2 -W2F-730	24.0 V			25 V	DC	23...25 V
LF05E -R1 <sup>2)</sup>	24.0 V	1.5 A	36.00 W	25 V	DC	23...25 V
LF05E -Y1 <sup>2)</sup>	24.0 V	1.5 A	36.00 W	25 V	DC	23...25 V
LF05E -T2	24.0 V		24.50 W	25 V	DC	23...25 V
LF05E -B2	24.0 V		24.50 W	25 V	DC	23...25 V

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

### Photometrical data

Product description	Color temperature	Color rendering index Ra	Light color (designation)	Light color LED	Nominal dominant wavelength	Luminous flux per meter
LF200 -G3-827-10	2700 K	>80	Warm White	White	-	200 lm
LF200 -G3-830-10	3000 K	>80	Warm White	White	-	200 lm
LF200 -G3-840-10	4000 K	>80	Cold White	White	-	200 lm
LF200 -G3-865-10	6500 K	>80	Cold White	White	-	200 lm
LF200M -G3-BL-06	monochromatic K		Blue	Blue	467 nm	48 lm
LF200M -G3-YE-06	monochromatic K		Yellow	Yellow	587 nm	140 lm
LF200M -G3-RE-06	monochromatic K		Red	Red	625 nm	140 lm
LF200M -G3-GR-06	monochromatic K		Green	Green	522 nm	157 lm

## Product family datasheet

Product description	Color temperature	Color rendering index Ra	Light color (designation)	Light color LED	Nominal dominant wavelength	Luminous flux per meter
LF05E2 -W2F-824	2400 K	>80	Warm Comfort Light	White	-	220 lm
LF05E2 -W2F-827 <sup>1)</sup>	2700 K	>80	Warm White	White	-	240 lm
LF05E2 -W2F-830	3000 K	>80	Warm White	White	-	240 lm
LF05E2 -W2F-840 <sup>2)</sup>	4000 K	>80	Cool White	White	-	240 lm
LF05E2 -W2F-865 <sup>2)</sup>	6500 K	>80	Cool Daylight	White	-	250 lm
LF05E2 -W2F-730	3000 K	>70	Warm White	White	-	220 lm
LF05E -R1 <sup>2)</sup>			Red	Red	625 nm	140 lm
LF05E -Y1 <sup>2)</sup>			Yellow	Yellow	587 nm	140 lm
LF05E -T2			Green	Green	525 nm	157 lm
LF05E -B2			Blue	Blue	470 nm	50 lm

Product description	Luminous flux	Luminous efficacy
LF200 -G3-827-10	2000 lm	110 lm/W
LF200 -G3-830-10	2000 lm	110 lm/W
LF200 -G3-840-10	2000 lm	121 lm/W
LF200 -G3-865-10	2000 lm	121 lm/W
LF200M -G3-BL-06	290 lm	12 lm/W <sup>3)</sup>
LF200M -G3-YE-06	840 lm	23 lm/W <sup>3)</sup>
LF200M -G3-RE-06	840 lm	23 lm/W <sup>3)</sup>
LF200M -G3-GR-06	940 lm	38 lm/W <sup>3)</sup>
LF05E2 -W2F-824		
LF05E2 -W2F-827 <sup>1)</sup>	2050 lm	57 lm/W
LF05E2 -W2F-830	2200 lm	
LF05E2 -W2F-840 <sup>2)</sup>	2400 lm	
LF05E2 -W2F-865 <sup>2)</sup>	2200 lm	61 lm/W
LF05E2 -W2F-730	2200 lm	61 lm/W
LF05E -R1 <sup>2)</sup>	840 lm	
LF05E -Y1 <sup>2)</sup>	840 lm	
LF05E -T2	940 lm	
LF05E -B2	290 lm	

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>3)</sup> For white color

### Light technical data

## Product family datasheet

Product description	Beam angle
LF200 -G3-827-10	120 °
LF200 -G3-830-10	120 °
LF200 -G3-840-10	120 °
LF200 -G3-865-10	120 °
LF200M -G3-BL-06	120 °
LF200M -G3-YE-06	120 °
LF200M -G3-RE-06	120 °
LF200M -G3-GR-06	120 °
LF05E2 -W2F-824	120 °
LF05E2 -W2F-827 <sup>1)</sup>	120 °
LF05E2 -W2F-830	120 °
LF05E2 -W2F-840 <sup>2)</sup>	120 °
LF05E2 -W2F-865 <sup>2)</sup>	120 °
LF05E2 -W2F-730	120 °
LF05E -R1 <sup>2)</sup>	120 °
LF05E -Y1 <sup>2)</sup>	120 °
LF05E -T2	120 °
LF05E -B2	120 °

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems](http://www.osram.com/led-systems)/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems](http://www.osram.com/led-systems)/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

### LED module information

Product description	Number of LEDs per module	Number of LEDs per meter
LF200 -G3-827-10	600	60
LF200 -G3-830-10	600	60
LF200 -G3-840-10	600	60
LF200 -G3-865-10	600	60
LF200M -G3-BL-06		
LF200M -G3-YE-06		
LF200M -G3-RE-06		
LF200M -G3-GR-06		
LF05E2 -W2F-824	500	50
LF05E2 -W2F-827 <sup>1)</sup>	200	50
LF05E2 -W2F-830	500	50
LF05E2 -W2F-840 <sup>2)</sup>	500	50
LF05E2 -W2F-865 <sup>2)</sup>	200	50
LF05E2 -W2F-730	200	50
LF05E -R1 <sup>2)</sup>	200	33

## Product family datasheet

Product description	Number of LEDs per module	Number of LEDs per meter
LF05E -Y1 <sup>2)</sup>	200	33
LF05E -T2	200	33
LF05E -B2	200	33

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems](http://www.osram.com/led-systems)/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems](http://www.osram.com/led-systems)/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

### Dimensions & weight

Product description	Length	Length – smallest unit	Width	Height	Product weight
LF200 -G3-827-10	10000 mm	100.0 mm	8.0 mm	1.0 mm	135.00 g
LF200 -G3-830-10	10000 mm	100.0 mm	8.0 mm	1.0 mm	135.00 g
LF200 -G3-840-10	10000 mm	100.0 mm	8.0 mm	1.0 mm	135.00 g
LF200 -G3-865-10	10000 mm	100.0 mm	8.0 mm	1.0 mm	135.00 g
LF200M -G3-BL-06	6000 mm <sup>3)</sup>	150.0 mm	8.0 mm	2.5 mm <sup>4)</sup>	39.00 g
LF200M -G3-YE-06	6000 mm <sup>3)</sup>	150.0 mm	8.0 mm	2.5 mm <sup>4)</sup>	39.00 g
LF200M -G3-RE-06	6000 mm <sup>3)</sup>	150.0 mm	8.0 mm	2.5 mm <sup>4)</sup>	39.00 g
LF200M -G3-GR-06	6000 mm <sup>3)</sup>	150.0 mm	8.0 mm	2.5 mm <sup>4)</sup>	39.00 g
LF05E2 -W2F-824	10000 mm <sup>5)</sup>	100.0 mm	8.0 mm	2.5 mm	40.00 g
LF05E2 -W2F-827 <sup>1)</sup>	10000 mm <sup>5)</sup>	100.0 mm	8.0 mm	2.5 mm	40.00 g
LF05E2 -W2F-830	10000 mm <sup>5)</sup>	100.0 mm	8.0 mm	2.5 mm	40.00 g
LF05E2 -W2F-840 <sup>2)</sup>	10000 mm <sup>5)</sup>	100.0 mm	8.0 mm	2.5 mm	40.00 g
LF05E2 -W2F-865 <sup>2)</sup>	10000 mm <sup>5)</sup>	100.0 mm	8.0 mm	2.5 mm	40.00 g
LF05E2 -W2F-730	10000 mm <sup>5)</sup>	100.0 mm	8.0 mm	2.5 mm	40.00 g
LF05E -R1 <sup>2)</sup>	6000 mm <sup>3)</sup>	150.0 mm	8.0 mm	2.5 mm	39.00 g
LF05E -Y1 <sup>2)</sup>	6000 mm <sup>3)</sup>	150.0 mm	8.0 mm	2.5 mm	39.00 g
LF05E -T2	6000 mm <sup>3)</sup>	150.0 mm	8.0 mm	2.5 mm	39.00 g
LF05E -B2	6000 mm <sup>3)</sup>	150.0 mm	8.0 mm	2.5 mm	39.00 g

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems](http://www.osram.com/led-systems)/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems](http://www.osram.com/led-systems)/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values


<sup>3)</sup> LED pitch 30 mm

<sup>4)</sup> without tape


<sup>5)</sup> LED pitch 20 mm

## Product family datasheet

### Product line drawing

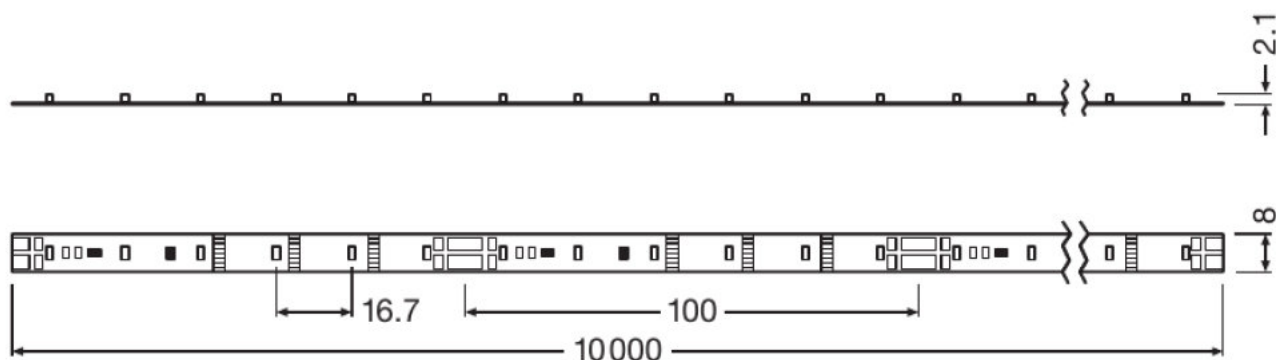


LF200 -G3-827-10, LF200 -G3-830-10, LF200 -G3-840-10, LF200 -G3-865-10

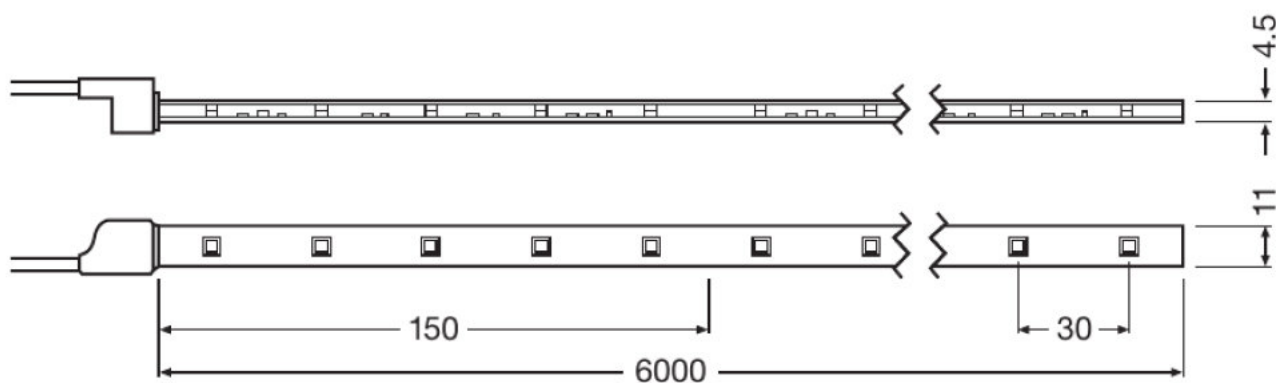


LF200M -G3-BL-06, LF200M -G3-YE-06, LF200M -G3-RE-06, LF200M -G3-GR-06

## Product family datasheet

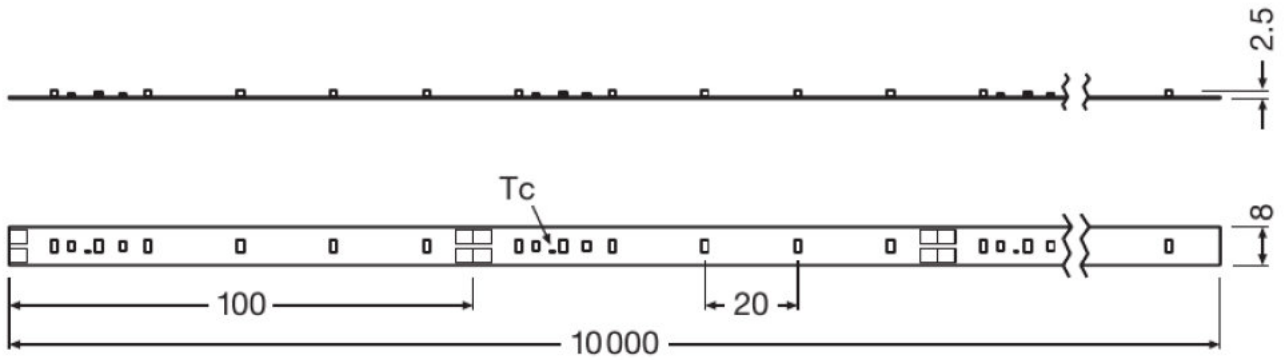

LF05E2 -W2F-824, LF05E2 -W2F-827, LF05E2 -W2F-865, LF05E2 -W2F-730

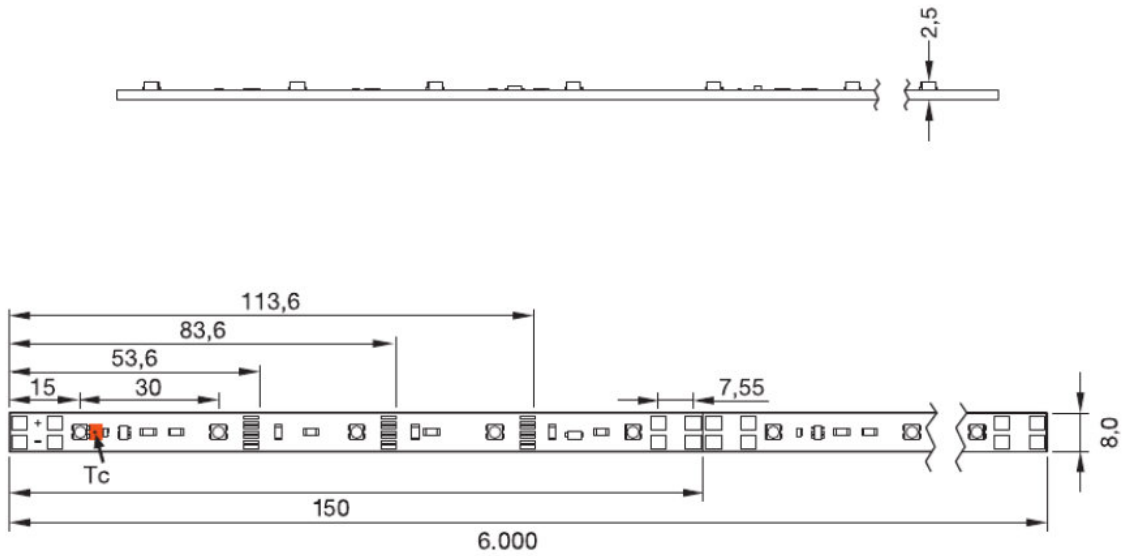

LF05E -R1, LF05E -Y1, LF05E -T2, LF05E -B2

### Temperatures & operating conditions

Product description	Temperature range in operation
LF200 -G3-827-10	-20...75 °C

## Product family datasheet

Product description	Temperature range in operation
LF200 -G3-830-10	-20...75 °C
LF200 -G3-840-10	-20...75 °C
LF200 -G3-865-10	-20...75 °C
LF200M -G3-BL-06	-20...75 °C <sup>3)</sup>
LF200M -G3-YE-06	-20...75 °C <sup>3)</sup>
LF200M -G3-RE-06	-20...75 °C <sup>3)</sup>
LF200M -G3-GR-06	-20...75 °C <sup>3)</sup>
LF05E2 -W2F-824	
LF05E2 -W2F-827 <sup>1)</sup>	-20...85 °C <sup>3)</sup>
LF05E2 -W2F-830	
LF05E2 -W2F-840 <sup>2)</sup>	-20...75 °C
LF05E2 -W2F-865 <sup>2)</sup>	-20...85 °C <sup>3)</sup>
LF05E2 -W2F-730	-20...85 °C <sup>3)</sup>
LF05E -R1 <sup>2)</sup>	-30...75 °C <sup>3)</sup>
LF05E -Y1 <sup>2)</sup>	-30...75 °C <sup>3)</sup>
LF05E -T2	-30...75 °C <sup>3)</sup>
LF05E -B2	-30...75 °C <sup>3)</sup>

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>3)</sup> At the T<sub>c</sub> point

### Lifespan

Product description	Lifespan
LF200 -G3-827-10	50000 h <sup>3)</sup>
LF200 -G3-830-10	50000 h <sup>3)</sup>
LF200 -G3-840-10	50000 h <sup>3)</sup>
LF200 -G3-865-10	50000 h <sup>3)</sup>
LF200M -G3-BL-06	50000 h <sup>3)</sup>
LF200M -G3-YE-06	50000 h <sup>3)</sup>
LF200M -G3-RE-06	50000 h <sup>3)</sup>
LF200M -G3-GR-06	50000 h <sup>3)</sup>
LF05E2 -W2F-824	50000 h <sup>3)</sup>
LF05E2 -W2F-827 <sup>1)</sup>	50000 h <sup>3)</sup>
LF05E2 -W2F-830	50000 h <sup>3)</sup>
LF05E2 -W2F-840 <sup>2)</sup>	50000 h <sup>3)</sup>
LF05E2 -W2F-865 <sup>2)</sup>	50000 h <sup>3)</sup>
LF05E2 -W2F-730	50000 h <sup>3)</sup>
LF05E -R1 <sup>2)</sup>	50000 h <sup>3)</sup>
LF05E -Y1 <sup>2)</sup>	50000 h <sup>3)</sup>



## Product family datasheet

Product description	Lifespan
LF05E -T2	50000 h <sup>3)</sup>
LF05E -B2	50000 h <sup>3)</sup>

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>3)</sup> L70/B50 at T<sub>c</sub> 40 °C

### Capabilities

Product description	Dimmable
LF200 -G3-827-10	Yes
LF200 -G3-830-10	Yes
LF200 -G3-840-10	Yes
LF200 -G3-865-10	Yes
LF200M -G3-BL-06	Yes
LF200M -G3-YE-06	Yes
LF200M -G3-RE-06	Yes
LF200M -G3-GR-06	Yes
LF05E2 -W2F-824	
LF05E2 -W2F-827 <sup>1)</sup>	Yes
LF05E2 -W2F-830	Yes
LF05E2 -W2F-840 <sup>2)</sup>	Yes
LF05E2 -W2F-865 <sup>2)</sup>	Yes
LF05E2 -W2F-730	Yes
LF05E -R1 <sup>2)</sup>	Yes <sup>3)</sup>
LF05E -Y1 <sup>2)</sup>	Yes <sup>3)</sup>
LF05E -T2	Yes <sup>3)</sup>
LF05E -B2	Yes <sup>3)</sup>

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>3)</sup> PWM

### Certificates & standards

Product description	Energy consumption	Energy efficiency class
LF200 -G3-827-10	19 kWh/1000h	A++
LF200 -G3-830-10	19 kWh/1000h	A++

## Product family datasheet

Product description	Energy consumption	Energy efficiency class
LF200 -G3-840-10	17 kWh/1000h	A++
LF200 -G3-865-10	17 kWh/1000h	A++
LF200M -G3-BL-06		
LF200M -G3-YE-06		
LF200M -G3-RE-06		
LF200M -G3-GR-06		
LF05E2 -W2F-824	33 kWh/1000h	A+
LF05E2 -W2F-827 <sup>1)</sup>	33 kWh/1000h	A+
LF05E2 -W2F-830	33 kWh/1000h	A+
LF05E2 -W2F-840 <sup>2)</sup>	33 kWh/1000h	A+
LF05E2 -W2F-865 <sup>2)</sup>	33 kWh/1000h	A++
LF05E2 -W2F-730	1 kWh/1000h	A++
LF05E -R1 <sup>2)</sup>		
LF05E -Y1 <sup>2)</sup>		
LF05E -T2		
LF05E -B2		

Product description	Standards
LF200 -G3-827-10	CE/UL
LF200 -G3-830-10	CE/UL
LF200 -G3-840-10	CE/UL
LF200 -G3-865-10	CE/UL
LF200M -G3-BL-06	CE/UL/EAC
LF200M -G3-YE-06	CE/UL/EAC
LF200M -G3-RE-06	CE/UL/EAC
LF200M -G3-GR-06	CE/UL/EAC
LF05E2 -W2F-824	CE
LF05E2 -W2F-827 <sup>1)</sup>	CE
LF05E2 -W2F-830	CE
LF05E2 -W2F-840 <sup>2)</sup>	CE
LF05E2 -W2F-865 <sup>2)</sup>	CE
LF05E2 -W2F-730	CE
LF05E -R1 <sup>2)</sup>	Acc. to 2004/108/EC
LF05E -Y1 <sup>2)</sup>	Acc. to 2004/108/EC
LF05E -T2	Acc. to 2004/108/EC
LF05E -B2	Acc. to 2004/108/EC

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

### Logistical data

## Product family datasheet

Product description	Temperature range at storage
LF200 -G3-827-10	-40...85 °C
LF200 -G3-830-10	-40...85 °C
LF200 -G3-840-10	-40...85 °C
LF200 -G3-865-10	-40...85 °C
LF200M -G3-BL-06	
LF200M -G3-YE-06	-40...85 °C
LF200M -G3-RE-06	-40...85 °C
LF200M -G3-GR-06	-40...85 °C
LF05E2 -W2F-824	
LF05E2 -W2F-827 <sup>1)</sup>	-20...85 °C
LF05E2 -W2F-830	
LF05E2 -W2F-840 <sup>2)</sup>	
LF05E2 -W2F-865 <sup>2)</sup>	-20...85 °C
LF05E2 -W2F-730	-20...85 °C
LF05E -R1 <sup>2)</sup>	-40...85 °C
LF05E -Y1 <sup>2)</sup>	-40...85 °C
LF05E -T2	-40...85 °C
LF05E -B2	-40...85 °C

<sup>1)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems](http://www.osram.com/led-systems)/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

<sup>2)</sup> Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems](http://www.osram.com/led-systems)/All technical parameters apply to the entire module/In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

### Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Quick installation with optional SLIM TRACK System
- Perfectly matched to OPTOTRONIC 24 V electronic control gears

### Application advice

For more detailed application information and graphics please see product datasheet.

### Sales and Technical Support

Sales and Technical Support [www.osram.com](http://www.osram.com)
















### Country specific information

Product description	Product code	METEL-Code	SEG-No.	STK number	UK Org
---------------------	--------------	------------	---------	------------	--------






## Product family datasheet

LF05E2 -W2F-827	4008321971357	-	-	4030042	-
LF05E2 -W2F-830	4052899928435	-	-	4030068	-
LF05E2 -W2F-840	4052899928442	-	-	4030043	-
LF05E2 -W2F-865	4008321971418	-	-	4030044	-
LF05E -R1	4008321955418	OSRLF05ER1	-	4031337	-
LF05E -Y1	4008321955432	OSRLF05EY1	-	4031339	-
LF05E -T2	4008321955449	OSRLF05ET2	-	4031338	-
LF05E -B2	4008321955425	OSRLF05EB2	-	4031335	-

### Download Data

File	
	Brochures Light is freedom of design (EN)
	Certificates EAC Certificate
	Certificates UL Certificate
	Declarations of conformity Declaration of conformity
	Declarations of conformity Manufacturer Declaration
	Declarations of conformity Manufacturers Declaration LF200M G3
	Declarations of conformity Declaration of Conformity LF200M G3
	Product Datasheet 343461_LF05E2 Technical Datasheet
	Product Family Datasheet 707498_Technical Datasheet LF05E2
	Declarations of conformity Manufacturer declaration
	Addon Technical Information 685714_BinningSheet - LF05E2
	Declarations of conformity Declaration of conformity
	Eulumdat 484439_LF05E2-W2F-827
	Eulumdat 484436_LF05E2-W2F-865
	Eulumdat LF05E2-W2F-730

## Product family datasheet

	Product Datasheet 334085_LINEARlight Flex LF05E (EN)
	Eulumdat 322538_LF05E R1
	Eulumdat 322544_LF05E Y1
	Eulumdat 322539_LF05E T2
	Eulumdat 322537_LF05E B2

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899953222	LF200 -G3-827-10	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	2013.00 g
4052899953239	LF200 -G3-830-10	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	2013.00 g
4052899953246	LF200 -G3-840-10	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	2013.00 g
4052899953253	LF200 -G3-865-10	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	2013.00 g
4052899500082	LF200M -G3-BL-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1245.00 g
4052899500402	LF200M -G3-YE-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1245.00 g
4052899500365	LF200M -G3-RE-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1245.00 g
4052899500389	LF200M -G3-GR-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1245.00 g
4052899942790	LF05E2 -W2F-824	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1493.00 g
4008321971357	LF05E2 -W2F-827	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1489.00 g
4052899928435	LF05E2 -W2F-830	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1394.00 g
4052899928442	LF05E2 -W2F-840	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1493.00 g
4008321971418	LF05E2 -W2F-865	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1493.00 g
4008321971371	LF05E2 -W2F-730	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1489.00 g
4008321955418	LF05E -R1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1481.00 g

## Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321955432	LF05E -Y1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1481.00 g
4008321955449	LF05E -T2	Shipping carton box 8	202 mm x 195 mm x 240 mm	9.45 dm <sup>3</sup>	1481.00 g
4008321955425	LF05E -B2	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm <sup>3</sup>	1481.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Accessories Optional

Product description	Accessory name	Accessory code
LF05E2 -W2F-827	LINEARlight FLEX, -2100	▶ 4008321978998
LF05E2 -W2F-865	LINEARlight FLEX, -2100	▶ 4008321978998
LF05E2 -W2F-730	LINEARlight FLEX, -2100	▶ 4008321978998
LF05E -R1	LINEARlight FLEX, -2100	▶ 4008321978998
LF05E -Y1	LINEARlight FLEX, -2100	▶ 4008321978998
LF05E -T2	LINEARlight FLEX, -2100	▶ 4008321978998
LF05E -B2	LINEARlight FLEX, -2100	▶ 4008321978998

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.