


## e:cue Engines

e:cue engines are the perfect platform for building dynamic, effective and reliable lighting applications. These engines are the functional backbone of lighting installations controlling fixtures, interacting with user terminals and executing shows. e:cue engines are built for steadiness, long-term use and flexibility. They are feature-rich and benefit from many years pioneering work in the field of lighting control.

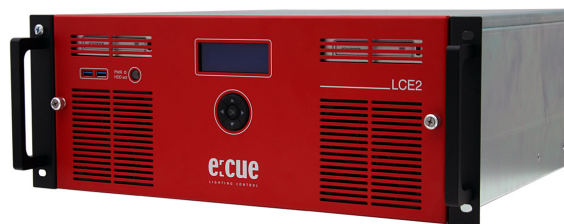

## e:cue Lighting Control Engine 2 fx

The Lighting Control Engine 2 fx (LCE2-fx) serves as a high performance server to control large lighting projects, the e:cue Lighting Application Suite is pre-installed and ready to run. As a central control unit, this versatile lighting control server orchestrates all devices and fixtures within a project. It also outputs other protocols such as KiNet and Art-Net and integrates various external engines and triggering sources. Also Emotion FX video mixing is fully supported. It can be mounted in a standard 19 inch rack or can be used as a standalone unit. The LCE2-fx is the ultimate server solution for any demanding lighting project.

### Main features

- e:cue's Lighting Application Suite pre-installed
- Executes Emotion FX in full production edition
- High quality components for reliable uninterrupted operation
- High performance graphics for video sequencing
- Integrated DMX inputs and outputs, dry contact inputs , relay outputs
- LC display and cursor keys for status messages and control
- Support for a variety of Ethernet-based protocols
- Easily mountable in 19 inch racks

### Delivery scope

- Lighting Control Engine 2 fx
- Rack mounting rails
- Ethernet cable 2 m CAT5e SFTP
- Printed LCE2 Setup Manual English/German
- Printed Lighting Application Suite System Manual English
- e:cue Lighting Application Suite LCE Edition with USB license dongle incl. Emotion FX support



XXXXXXX  
ETL LISTED  
Conforms to ANSI/UL Std 60950-1  
Certified to CAN/CSA STD C22.2 No. 60950-1

### Technical data

Item number LCE2	EN.LC.9400000
Dimensions (W x H x D)	491 x 176 x 432 mm 19.3 x 6.9 x 17 inch (incl. brackets)
Weight	15 kg
Power supply	100 ... 240 V AC, 50/60 Hz
Power consumption	190 W
Operating temperature	0 ... 35 °C/32 ... 95 °F
Storage temperature	-10 ... 70 °C/14 ... 158 °F
Operating/storage hum.	0 ... 95% non-condensing
Protection class	IP20
Housing	Steel, front powder-coated
Mounting	in 19-inch rack systems with rails
Certifications	CE, ETL
User interface	USB or PS/2 keyboard/mouse, LC Display, Keypad
Operating system	Microsoft® Windows 7™ 64 Bit Ultimate Edition
Ethernet ports	2 x e:net 10/100/1000 Mbps
Serial interfaces	2 x RS-232 Sub-D
Keyboard/mouse	2 x PS/2
USB	2 x USB3 (blue, front) 2 x USB3 (blue, rear) 2 x USB2 (black, rear)
DMX	2 x DMX/RDM output/input 1 kV galvanically isolated
Digital dry contacts	6 x inputs, max. 24 V DC off: Vin < 1 V DC, on: Vin > 4 V DC Input current Iin (typical): Vin = 5 V/Iin = 0.8 mA Vin = 12 V/Iin = 2.3 mA Vin = 24 V/Iin = 4.8 mA 12 V DC output: max. 70 mA, overload protected
Relay outputs	2 x SPDT, max. 24 V, 3A

## Technical data (contd.)

Graphics	High performance graphic 1 x Dual Link DVI-D 1 x Mini HDMI 1 x Dual Link DVI-I
Video input	DVI Input Capture, max. 1920 x 1080 x 24bit
Audio	1 x mic/line input 1 x headphone/line output
Data storage	Removable 120 GB SSD
Media drives	CD/DVD via USB port

## Dimensions

All dimensions in mm

