

OPTOTRONIC OT 18/200-240/700 DIM

Power supplies for LED modules




- Suitable for indoor applications

Product benefits

- Compact housing

Product features

- SELV equivalent
- Dimmable via external potentiometer
- Cable clamp housing for independent mounting
- 10 V control port

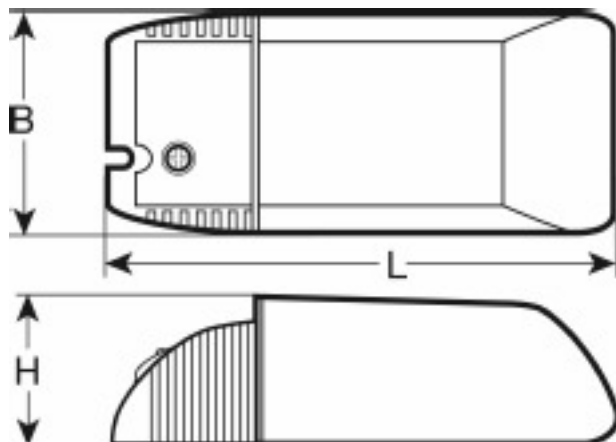

Product line drawing with letters

Technical data

Product description	Nominal current	Ambient temperature range	Input voltage	Nominal voltage	Output current	Mains frequency
	0.17 A ¹⁾	-20...+50 °C	180...254 V ²⁾	200...240 V	0...700 mA ³⁾	60 Hz

Product description	Output voltage	Dimming interface	Dimming range	Maximum temperature at tc test point
	2.0...25 V ⁴⁾	1...10 V	0...100 %	70 °C ⁵⁾

1) At 230 V

2) Permitted voltage range

3) ±5 %

4) Maximum <30 V

5) Maximum at the Tc-point

Safety advice

10 V control port not isolated

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.