

# PRODUCT FAMILY DATASHEET

## LEDVANCE OUTDOOR LED FACADE POLE

Stainless steel wall-luminaires with indirect illumination



---

### AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

---

### PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Special light guide design for low-glare illumination

---

### PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP44
- Housing made of Polycarbonate covered with stainless steel
- Available as wall, ceiling and bollard luminaires
- Available with and without motion sensor
- Diffuser made of transparent polycarbonate



TECHNICAL DATA


Product description	Electrical data						Photometrical data				
	Nominal wattage	Nominal voltage	Nominal current	Operating mode	Mains frequency	Power factor $\lambda$	Luminous efficacy	Luminous flux	Color temperature	Light color (designation)	Color rendering index Ra
LED FACADE POLE 6 W 3000 K SST <sup>1)</sup>	6.00 W	220...240 V	0.06 A	Mains voltage	50/60 Hz	>0.5	60 lm/W	360 lm	3000 K	Warm White	≥80
LED FACADE POLE 6 W 3000 K SST SENSOR <sup>1)</sup>	6.00 W	220...240 V	0.06 A	Mains voltage	50/60 Hz	>0.5	60 lm/W	360 lm	3000 K	Warm White	≥80

Product description	Standard deviation of color matching	Light technical data	Dimensions & weight			Colors & materials	Temperatures & operating conditions	Lifespan	
			Beam angle	Length	Width				Height
LED FACADE POLE 6 W 3000 K SST <sup>1)</sup>	<6 sdc	160 °	138.0 mm	102.0 mm	135.0 mm	Steel	-20...40 °C	15000	30000 h
LED FACADE POLE 6 W 3000 K SST SENSOR <sup>1)</sup>	<6 sdc	160 °	150.0 mm	102.0 mm	135.0 mm	Steel	-20...40 °C	15000	30000 h

Product description	Additional product data	Capabilities			Certificates & standards		
		Mounting location	Dimmable	LED module replaceable	Type of connection	Type of protection	Protection class
LED FACADE POLE 6 W 3000 K SST <sup>1)</sup>	Wall	No	Not replaceable	Terminal, 2-Pole (L, N)	IP44	II	IK06
LED FACADE POLE 6 W 3000 K SST SENSOR <sup>1)</sup>	Wall	No	Not replaceable	Terminal, 2-Pole (L, N)	IP44	II	IK06

Product description	Photobiological safety group	Standards
LED FACADE POLE 6 W 3000 K SST <sup>1)</sup>	RG 0	CE
LED FACADE POLE 6 W 3000 K SST SENSOR <sup>1)</sup>	RG 0	CE

<sup>1)</sup> Available from February 2018

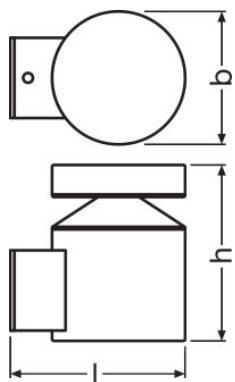

LED FACADE POLE 6 W 3000 K SST

#### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

#### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

#### LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075075092	LED FACADE POLE 6 W 3000 K SST	Shipping carton box 6	380 mm x 175 mm x 320 mm	21.28 dm <sup>3</sup>	3291.00 g
4058075075115	LED FACADE POLE 6 W 3000 K SST SENSOR	Shipping carton box 6	380 mm x 175 mm x 320 mm	21.28 dm <sup>3</sup>	3471.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.