

OPTOTRONIC OT 75/220-240/24 E

Constant voltage ECG 24 V for LED modules




- Suitable for outdoor applications

Product benefits

- High IP protection (IP64)
- Intelligent power matching thanks to Smart power supply
- Higher output power possible thanks to secondary-side parallel connection (up to 4 ECGs)

Product features

- SELV equivalent

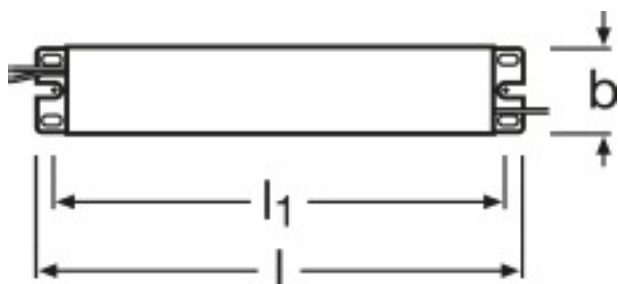

Product line drawing with letters



Product line drawing - technical

Technical data

Product description	Nominal current	Ambient temperature range	Input voltage	Nominal voltage	Mains frequency	Output voltage
	0.38 A	-20...+60 °C	198...254 V ¹⁾	220...240 V	50/60 Hz	24 V ²⁾

Product description	Maximum temperature at tc test point	Length
	85 °C ³⁾	241.0 mm

¹⁾ Permitted voltage range

²⁾ Electronically stabilized, line ripple maximum ±0.2 V

³⁾ Maximum at the Tc-point

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.