


Project: _____
 Type: _____

Allegro Media Tube® Lite RGBW



Allegro Media Tube® Lite fits into any wall, façade or media lighting application with tight installation requirements, while the wide beam angle output and 10-pixels-per-meter ensures a smooth illumination experience. Featuring auto addressing and quick lock connectivity, this greatly simplifies the lighting installation for building façades, media applications, bridges and more.

This product is intended for use in high-quality colored light applications.



Product Specifications

	Direct View			Diffused View		
	300mm	500mm	1000mm	300mm	500mm	1000mm
Light Source	18 RGBW 4 in 1	30 RGBW 4 in 1	60 RGBW 4 in 1	18 RGB + 18 White	30 RGB + 30 White	60 RGB + 60 White
Color Range	16.7 Million additive RGB colors; White 6500K					
Beam Angle	90°			115°x170°		
Luminous Flux	137 lm	224 lm	432 lm	144 lm	258 lm	513 lm
Efficacy	30.9 lm/W			36.6 lm/W		
Pixel Pitch	100mm					
Pixel Configuration	6 RGBW LEDs per pixel			6 RGB LEDs + 6 White LEDs per pixel		
Number of Pixel	3 pixels	5 pixels	10 pixels	3 pixels	5 pixels	10 pixels
Housing	Extruded Aluminum					
Cover Lens	Clear Glass			PC		
Adjustment Options	Fixed, non-adjustable					
Dimensions (W x H)	24 x 26mm, 32.6 x 54mm (mounting bracket included)			24 x 40mm, 32.6 x 68mm (mounting bracket included)		
Dimensions (L)	300mm	500mm	1000mm	300mm	500mm	1000mm
Weight	0.35kg	0.52kg	0.85kg	0.35kg	0.52kg	0.85kg
Regulatory Listing & Safety Approval	CE					
Operating Temperature	-40°C to +50°C / -40°F to +122°F					
Storage Temperature	-40°C to +70°C / -40°F to +158°F					
Environment	Outdoor, IP66, IK08 (Diffused View)					
Humidity	10-90%, non-condensing					

Electrical Specifications

Operating Voltage	48V DC
Power Consumption	4.2W / 7W / 14W

System Specifications

Control	DMX512
Power Supply	LED Engine 48V Outdoor
Addressing Options	Auto-addressing per daisy-chain
Fixture Interconnection	12 meters

LED CHARACTERISTICS Because LEDs are semiconductor devices, their performances are subject to inherent variability commonly found in semiconductor industry. To improve consistency in performance across the same product, LED manufacturers "sort" LEDs into bins according to different preset parameters, such as forward driving voltage, illumination, etc. Whereas binning is a sorting function, it is not a correction process. Inherent variability in the manufacturing process results always in different binning distributions according to different production lots. Traxon uses automatically binned LEDs on its products, thereby minimizing output variations within the model range.

As with all electronic devices, LED output degrades over time – a term called lumen depreciation. This also explains why it is nearly impossible to expect photometric performances of two LED products with different service life spans to be the same. The rate of LED degrade is a complicate function of many factors such as operating efficiency, duration of continuous operation, and more significantly, environmental conditions (ambient temperature for example). If allowed working under optimal operating temperature range and with good ventilation, LED devices enjoy long service lives over conventional light sources. When using/installing LED devices, care should be taken to ensure that the devices will operate within the operating conditions specified in respective product literature.

This product contains a light source of energy efficiency class G to Regulation (EU) No 2019/2015.
 Lumen measurement complies with LM-79-05 standard.
 Lumen maintenance is calculated based on LM-80 compliant measurement.


www.traxontechnologies.com | www.osram.us/traxon

©2021 TRAXON TECHNOLOGIES - AN OSRAM BUSINESS. ALL RIGHTS RESERVED. TRAXON™, TX CONNECT®, ARE TRADEMARKS OF TRAXON TECHNOLOGIES. U.S. PATENTS, E.U. PATENTS, JAPAN PATENTS, OTHER PATENTS PENDING. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Allegro Media Tube® Lite RGBW

Photometrics


Candela Distribution (Direct View)

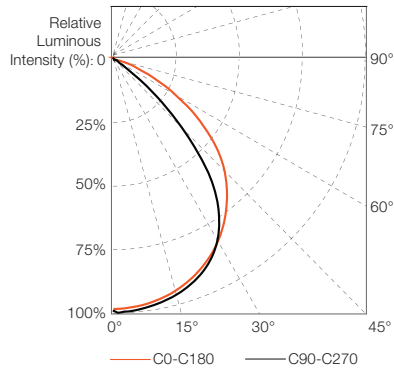


Light Output

Color	Luminous Flux (lm)
300	
White (RGBW full-on)	137 lm
RGB	65.7 lm
Red	22.2 lm
Green	44.2 lm
Blue	7.2 lm
White (RGB off)	76.1 lm
500	
White (RGBW full-on)	224 lm
RGB	103.4 lm
Red	32.4 lm
Green	62.7 lm
Blue	10 lm
White (RGB off)	124.6 lm
1000	
White (RGBW full-on)	432 lm
RGB	197.6 lm
Red	67.6 lm
Green	121.1 lm
Blue	24.6 lm
White (RGB off)	244.8 lm

Illuminance at a Distance

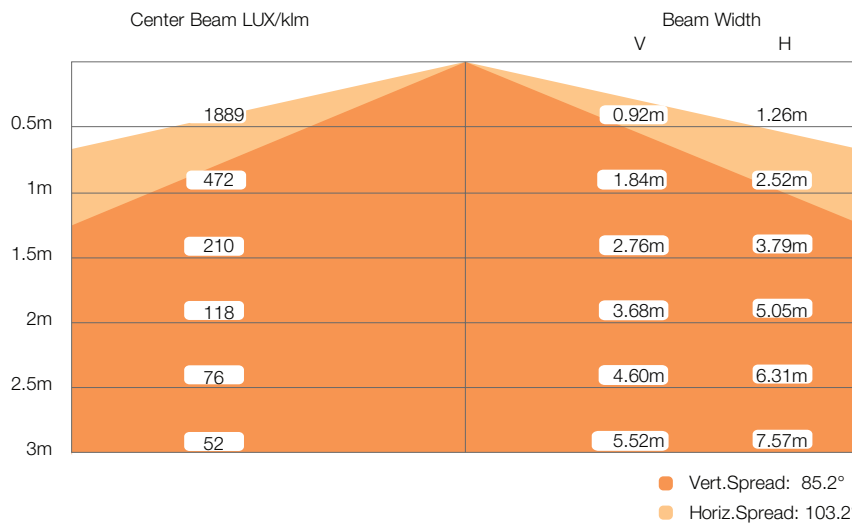

Candela Distribution (Diffused View)

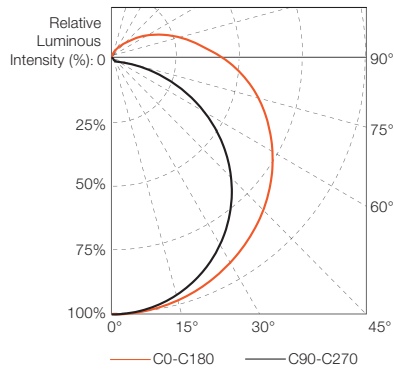

Light Output

Color	Luminous Flux (lm)
300	
White (RGBW full-on)	144 lm
RGB	65.2 lm
Red	26.5 lm
Green	41.3 lm
Blue	11.5 lm
White (RGB off)	81 lm
500	
White (RGBW full-on)	258 lm
RGB	110.1 lm
Red	33.7 lm
Green	71.3 lm
Blue	10.1 lm
White (RGB off)	146.5 lm
1000	
White (RGBW full-on)	513 lm
RGB	219.4 lm
Red	60.9 lm
Green	141.2 lm
Blue	20.7 lm
White (RGB off)	295.8 lm

Illuminance at a Distance


	Center Beam LUX/klm	Beam Width	
		V	H
0.5m	840	19.08m	1.52m
1m	210	38.16m	3.03m
1.5m	93	57.24m	4.55m
2m	53	76.32m	6.07m
2.5m	34	95.41m	7.58m
3m	23	114.49m	9.10m

■ Vert.Spread: 174°
■ Horiz.Spread: 113.2°


Allegro Media Tube® Lite RGBW

Dimensions

Fixture Dimensions (Direct View)

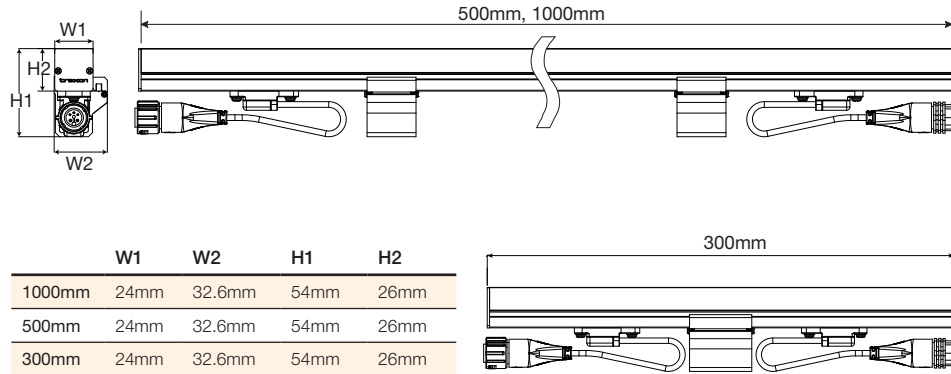


Fixture Dimensions (Diffused View)

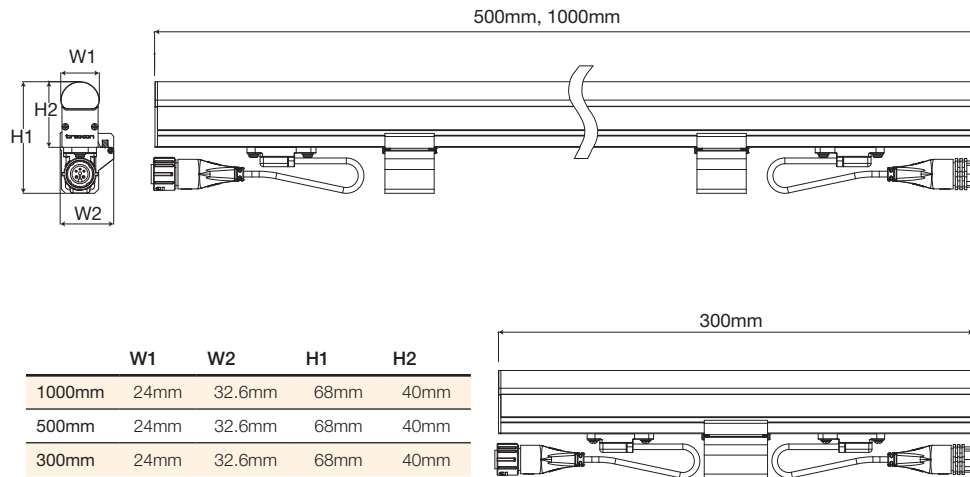


Accessories Dimensions


Starter Cable

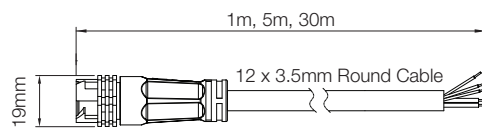

Interconnection Cable

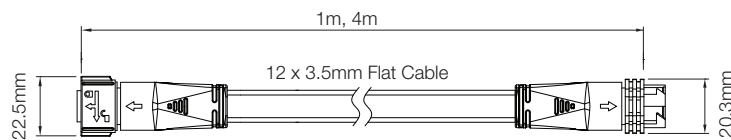


End Cap with 120 Ohm Terminator




www.traxontechnologies.com | www.osram.us/traxon

©2021 TRAXON TECHNOLOGIES - AN OSRAM BUSINESS. ALL RIGHTS RESERVED. TRAXON™, TX CONNECT®, ARE TRADEMARKS OF TRAXON TECHNOLOGIES. U.S. PATENTS, E.U. PATENTS, JAPAN PATENTS, OTHER PATENTS PENDING. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Cable Connection


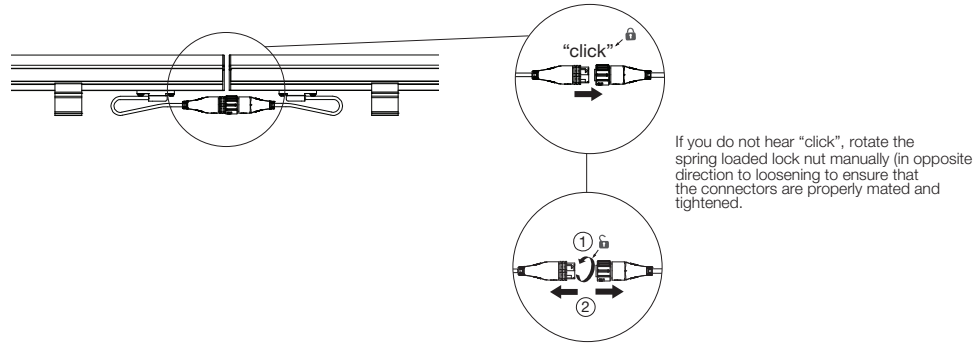


Bracket Mounting

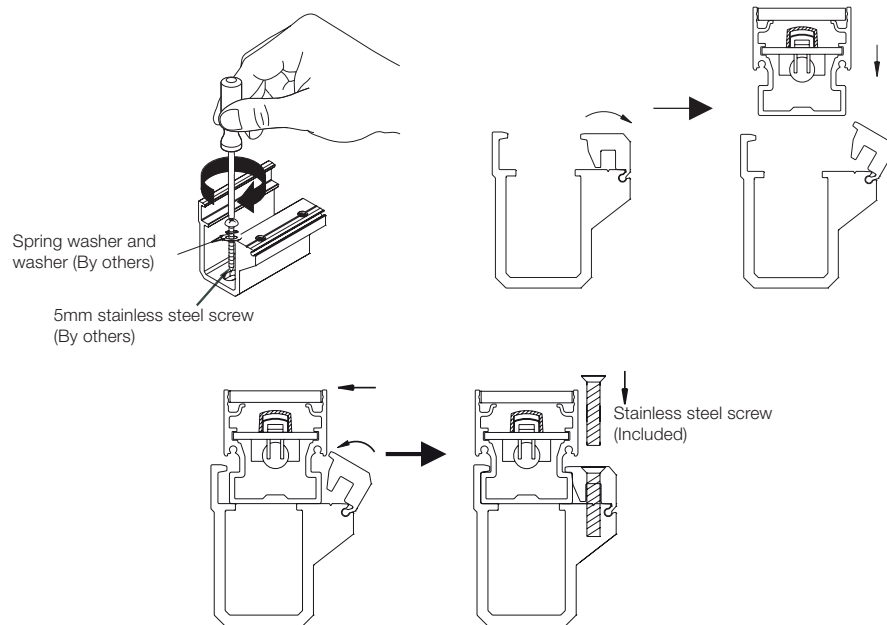


Tube-to-Tube Clearance


To maintain consistent LED pitch and to allow for thermal expansion for Tubes.



Connector Pin Assignment




Wire#	Description	Color
1	DMX+	Green
2	Address	Yellow
3	DMX-	Blue
4	DC48V-	Black
5	DC48V+	Red



www.traxontechnologies.com | www.osram.us/traxon

©2021 TRAXON TECHNOLOGIES - AN OSRAM BUSINESS. ALL RIGHTS RESERVED. TRAXON™, TX CONNECT®, ARE TRADEMARKS OF TRAXON TECHNOLOGIES. U.S. PATENTS, E.U. PATENTS, JAPAN PATENTS, OTHER PATENTS PENDING. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

System Diagram

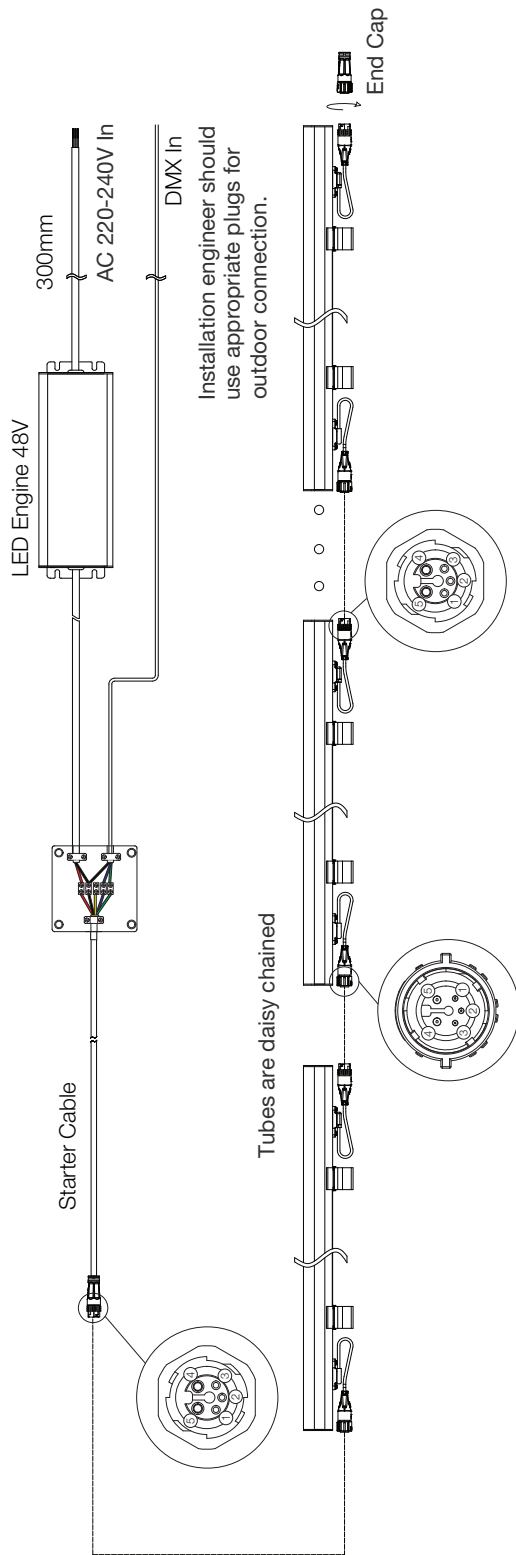

Pin#	Signal	Wire Size	Color	Connection
5	DC48V+	1.0mm ²	Red	DC48V+
4	DC48V-	1.0mm ²	Black	DC48V- and GND
1	DMX+	0.3mm ²	Green	DMX+
3	DMX-	0.3mm ²	Blue	DMX-
2	Address	0.3mm ²	Yellow	Do not connect

Color Type	Max. Daisy Chain	PSU Power
RGBW	12m	240W
RGB	17m	320W
DW	20m	320W

The Address wire only need to be connected during address configuration, it is not needed during operation. This wiring diagram shows only typical connections. Actual wiring depends on LED Tube configuration and installation. Actual no. vary according to cable lengths and signal source. Please consult your local Traxon office for aid.

Allegro Media Tube® Lite RGBW

Ordering

Fixtures

Model No.	Description	Item Code
TU.AL.3110400	AL MT LT RGBW 1000 10PXL DF R CE	AM424650055
TU.AL.2105400	AL MT LT RGBW 500 5PXL DF R CE	AM424660055
TU.AL.1103400	AL MT LT RGBW 300 3PXL DF R CE	AM424670055
TU.AL.3410300	AL MT LT RGBW 1000 10PXL CR CE	AM424830055
TU.AL.2405300	AL MT LT RGBW 500 5PXL CR CE	AM424840055
TU.AL.1403300	AL MT LT RGBW 300 3PXL CR CE	AM424850055

TX Connect

Model No.	Description	Item Code
TU.AC.1200100	AL MT LT STARTER CABLE, 5-WIRE, 1M	AM410720055
TU.AC.1200200	AL MT LT STARTER CABLE, 5-WIRE, 5M	AM410730055
TU.AC.1200300	AL MT LT STARTER CABLE, 5-WIRE, 30M	AM410740055
TU.AC.1200500	AL MT LT INTER CABLE, 5-WIRE, 1M	AM410770055
TU.AC.1200600	AL MT LT INTER CABLE, 5-WIRE, 4M	AM410780055
TU.AC.1200400	AL MT LT END CAP WITH 120Ω TERMINATOR	AM410750055

TX Control

Model No.	Description	Item Code
	LED ENGINE 240W 48V OUTDOOR	AM089330055
PS.CU.0000008	LED ENGINE 100W 48V OUTDOOR	AA766150055

Our Brands

traxon **etcue**
www.traxontechnologies.com | www.osram.us/traxon

OSRAM

©2021 TRAXON TECHNOLOGIES - AN OSRAM BUSINESS. ALL RIGHTS RESERVED. TRAXON™, TX CONNECT®, ARE TRADEMARKS OF TRAXON TECHNOLOGIES. U.S. PATENTS, E.U. PATENTS, JAPAN PATENTS, OTHER PATENTS PENDING. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.