

traxon



LED Engine 150W 15V Outdoor



PS.OA.0012000

A universal AC input Power Supply Unit (PSU), equipped with outdoor ready connector for the Dot XL system.
The LED Engine Smart 150W 15V Outdoor is a slim, fanless power supply that ensures high reliability in any LED lighting application.



OUTPUT SPECIFICATIONS

- **DC Voltage:** 15V
- **Rated Current:** 9.5A
- **Rated Power:** 142.5W
- **Ripple & Noise (max.):** 150mVp-p
- **Voltage Tolerance:** ±0.5%
- **Line Regulation:** ±0.5%
- **Load Regulation:** ±1.0%
- **Setup, Rise Time:** 3000ms, 80ms at full load 230VAC/115VAC
- **Hold Up Time (typ.):** 50ms / 230VAC; 16ms / 115VAC at full load

INPUT SPECIFICATIONS

- **Mains Interface:** Open cable
- **Voltage Range:** 100 ~ 280VAC
- **Frequency Range:** 47 ~ 63Hz
- **Power Factor (typ.):** PF ≥ 0.95/230VAC; PF ≥ 0.98/115VAC at full load and rated output voltage; PF ≥ 0.9 at 75 ~ 100% load
- **Efficiency (typ.):** 88%
- **AC Current (typ.):** 2A / 115VAC; 1A / 230VAC
- **Inrush Current (typ.):** COLD START 65A / 230VAC
- **Leakage Current (typ.):** <1mA / 240VAC

PROTECTION

- **Over Current:** 98 ~ 108% rated output power (Constant current limiting, recovers automatically after fault condition is removed)
- **Over Voltage:** 18 ~ 20V (Shut down and latch off output voltage, re-power on to recover)
- **Over Temperature:** 100°C ± 10°C / 212°F ± 50°F (RTH2) (Shut down output voltage, re-power on to recover)

ENVIRONMENT

- **Working Temperature:** -30°C ~ +55°C / -22°F ~ +131°F @ full load; +70°C / + 158°F @ 60% load
- **Working Humidity:** 20 ~ 95% RH non-condensing
- **Storage Temperature; Humidity:** -40°C ~ +80°C / -40°F ~ +176°F; 10 ~ 95% RH
- **Vibration:** 10 ~ 500Hz, 5G 12min./cycle, period for 72min. each along X, Y, Z, axes

traxon



LED Engine 150W 15V Outdoor


SAFETY & EMC

- **Safety Standards:** UL60950-1, TUV EN60950-1, EN61347-1, EN61347-2-13 approved
- **EMI Conduction & Radiation:** Compliance to EN55022 (CISPR22) Class B
- **Harmonic Current:** Compliance to EN61000-3-2,3
- **EMS Immunity:** Compliance to EN61000-4-2,3,4,5,6,8,11; EN55024, light industry level, criteria A

OTHERS

- **MTBF:** 303.7khrs min. MIL-HDBK-217F (25°C / 77°F)
- **Dimension :** 222mm x 68mm x 39mm / 8.7" x 2.7" x 1.5"
- **Cables :** 1000mm/39.37" 18AWGx3C AC input cable; 300mm/11.8" 14AWGx2C DC output cable
- **Packing:** 1kg / 2.2lbs

DERATING CURVE

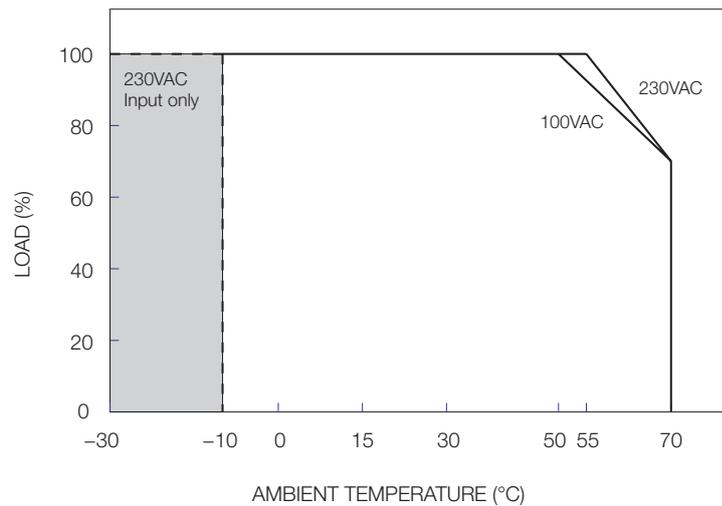



TECHNICAL DRAWING

