

Light-Drive Elite is a wall-mounted standalone DMX controller and interactive user interface for dynamic lighting. End-users can easily setup color changing effects and control lighting directly using the device. The user interface features touch-sensitive keys and a wheel with color LEDs for intuitive selection of colors and adjustment of intensity and speed. Memory functions allows end-users to define four colors for color-changing effects. It can be easily connected to LED RGB fixtures through an RJ45 connection for power and data. Light-Drive Elite's glassy finish is designed for an elegant appearance as well as easy maintenance.

KEY FEATURES

- Standalone DMX controller and user interface
- 512 channels DMX output (RGB)
- 4 mode keys to select intensity, color, white and memory mode.
- On/off key and a play/pause key
- 4 user-defined memory slots
- 5 status LEDs
- Touch wheel with 12 RGB LEDs
- Built-in IR receiver for remote control
- Glass finish
- Ultra thin design
- Available in black or white
- Color chase on up to 12 RGB fixtures / light-points with spread effect
- Wall mountable

PACKAGE CONTENT

	Item-No.
• Light-Drive Elite	See right col.
• Setup Manual	120032
• Hexagon screw key	130010
• Power and data merger	160189
• Mounting plate	70124

ACCESSORIES

	Item-No.
• IR remote control	160079

GENERAL SPECIFICATIONS

	Item-No.
Light-Drive Elite black	160216
Light-Drive Elite white	160217
Dimensions (W x H x D)	160 x 80 x 11 / 6.3 x 3.15 x 0.43
Weight	0.3 kg / 0.66 lbs
Power	24V DC, 100mA, via RJ45
Operating / storage temp.	0°-40°C / 32-104 F
Operating / storage humidity	0-80% non-condensing
Environment	IP20
Housing	Glass (surface), Aluminium (housing)
Mounting	In-wall mounting
Certifications	CE


LIGHT-DRIVE SPECIFICATIONS

User interface	Capacitive touch sensor
DMX output	RJ45
Remote control	IR (RC5)




DIMENSIONS

all measures in mm / inch

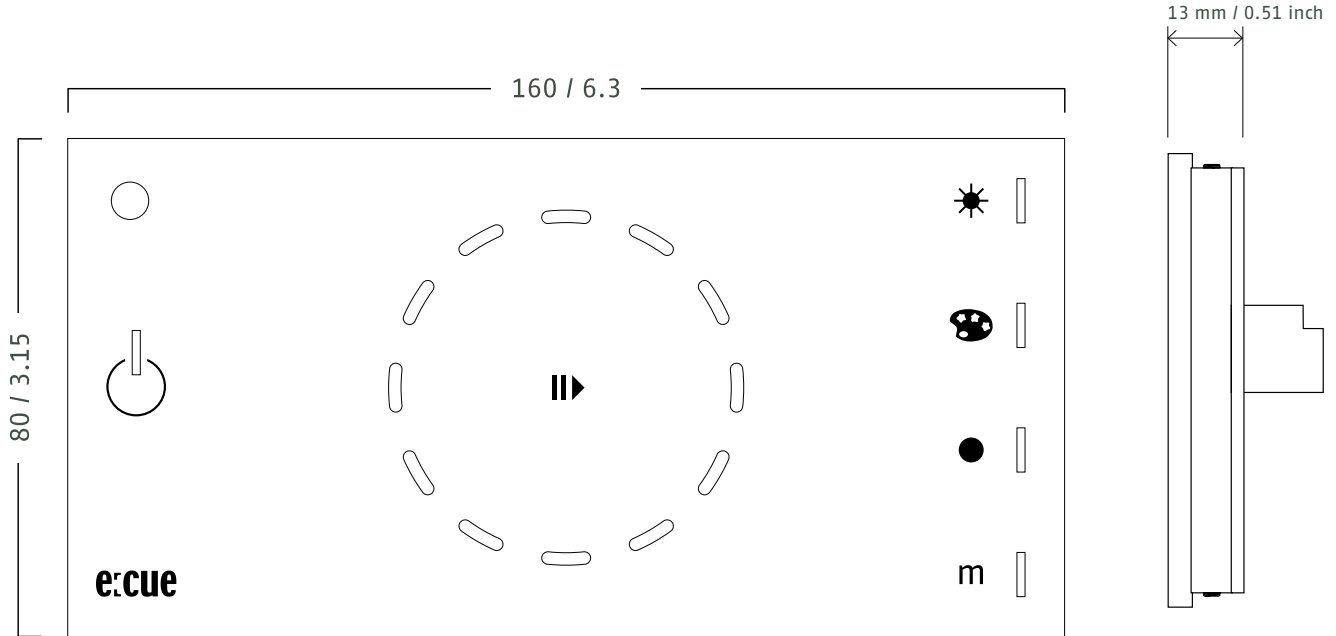

Power and data merger



Mouting Plate

